

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

McPherson County. Sec. 4 Twp. 20S Rge. 1 (E) 1 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE $\frac{1}{4}$
Lease Owner. Phillips Petroleum Company
Lease Name. Vogts Well No. 1
Office Address. Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. August 8 19 44
Application for plugging filed. August 9 19 44
Application for plugging approved. August 9 19 44
Plugging commenced. August 9 19 44
Plugging completed. August 9 19 44
Reason for abandonment of well or producing formation. Dry Hole

NORTH

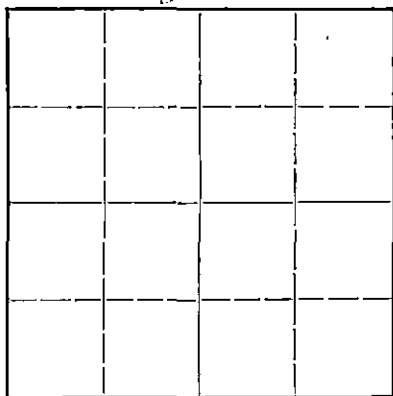

Locate well correctly on above
Section Flat

Name of Conservation Agent who supervised plugging of this well. Rule Durkee
Producing formation. Arbuckle Depth to top. 3543 Bottom. 3572 Total Depth of Well. 3572 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Viola</u>	<u>Dry</u>	<u>3435</u>		<u>8 5/8"</u>	<u>122'</u>	<u>None</u>
<u>Simpson</u>	<u>Dry</u>	<u>3465</u>				
<u>Arbuckle</u>	<u>Dry</u>	<u>3543</u>				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with mud from 3572' to 150', ran 15 sacks of cement at 150'. Filled with mud to 25', ran 10 sacks of cement in filling to base of cellar.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Ralph McKnight
Address. Box 528 - Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
Ralph McKnight (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph McKnight
Box 528 - Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of September, 19 44

My Commission Expires June 14, 1948

My commission expires

Robert J. Mason
Notary Public.

Formation Record

Lease VOOTS

Well No. 1

FROM	TO	Formation	REMARKS
0	20	Clay	
20	30	Sand	
30	603	Lime & Shale	
603	775	Sand & Lime	
775	970	Lime & Shale	
970	1000	Lime	
1000	1690	Shale & Shells	
1690	1943	Lime & Shale	
1943	2460	Lime	
2460	2600	Lime & Shale	
2600	2808	Lime	
2808	2990	Shale	
2990	3128	Chert	
3128	3141	Chert & Lime	
3141	3158	Lime	
3158	3255	Lime & Shale	
3255	3480	Lime	
3480	3497	Sandy Lime	
3497	3525	Lime	
3525	3539	Sandy Lime	
3539	3544	Shale	
3544	3572	Lime	

Elevation 1539' D.P.

Top Viola 3436'
Top Simpson 3455'Top Arbuckle 3545'--Fair porosity--
with no shows.

PLUMSTING
FILE 4-20-11K
BOOK PAGE-127-1139