


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

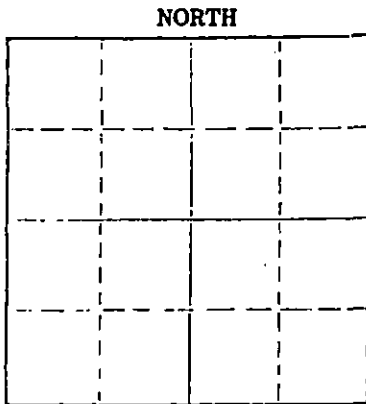

Locate well correctly on above Section Plot

McPherson County. Sec. 19 Twp. 20 Rge. 2 W (W)  
Location as "NE/CNWxSWx" or footage from lines: C NW NE  
Lease Owner: Hummon Oil Company  
Lease Name: ZERGER Well No. 1  
Office Address: 860 Sutton Place, Wichita, Ks. 67202  
Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole  
Date well completed: December 19 19 75  
Application for plugging filed: December 18 19 75  
Application for plugging approved: December 18 19 75  
Plugging commenced: December 19 19 75  
Plugging completed: December 19 19 75  
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well: Hugh Scott  
Producing formation: Depth to top: Bottom: Total Depth of Well: 3055 feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole full of heavy mud. Plug @ 250' w/35 sacks cement thru drill pipe.  
Mud to 50' w/1/2 sack hulls plug & 15 sacks cement. 2 sacks in rat hole.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor: Duke Drilling Co.  
Address: Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON  
Larry Curtis (employee of owner) or (operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis  
Box 823, Great Bend, Kansas (Address)

Subscribed and sworn to before me this 22nd day of December 19 75

My commission expires April 11, 1978  
Alexander M. Wague Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 23 1975 12-26-75  
CONSERVATION DIVISION  
WICHITA, KANSAS

DRILLERS' WELL LOG

Date Commenced: December 11, 1975  
Date Completed: December 19, 1975

Hummon Oil Company  
ZERGER # 1  
C NW NE of Sec 19-T20-R2W  
McPherson County, Kansas

ELEVATION: 1512 K.B.

0 - 204'	Red Bed, Sand Streaks
204 - 740'	Shale
740 - 995'	Shale and Lime
995 - 2376'	Lime and Shale
2376 - 2732'	Lime
2732 - 3025'	Lime and Shale
3025 - 3055'	Lime
3055'	RTD

FORMATION TOPS

Brown Lime	2332
Lansing	2376
Base K.C.	2732
Mississippi	3025
RTD	3055

SURFACE PIPE:

Set 203' of used 8 5/8", 28#  
pipe w/160 sacks Common,  
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 22nd day of December, 1975.

Dorothy M. Hague  
Notary Public

My Commission Expires: April 11, 1978

6-10-75  
RECORDED  
INDEXED