


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
2.2 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

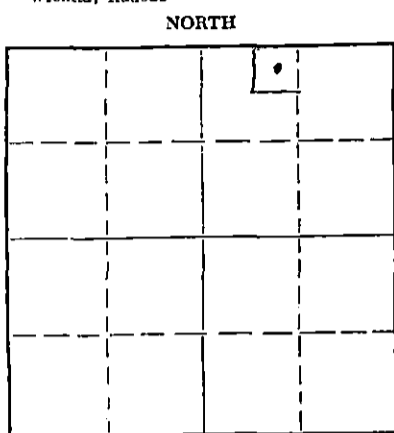

Locate well correctly on above Section Plat

McPherson County. Sec. 24 Twp. 20 Rge. 2W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NE NW NE
Lease Owner Art Small
Lease Name Meyer Well No. 1
Office Address East Country Club Road, Route #3, Salina, Ks. 67401
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-26-68 19
Application for plugging filed 3-26-68 19
Application for plugging approved 3-26-68 19
Plugging commenced 3-26-68 @ 3:00 a.m. 19
Plugging completed 3-26-68 @ 8:00 a.m. 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2974 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	188	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 180'
Set bridge on mud
Dumped 25 sacks of cement on bridge
Filled hole with mud to 40'
Set plug on mud
Filled hole to surface with cement
Plugging completed.



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Slusser Drilling Company
Address Box 275 Marion, Kansas 66861

STATE OF Kansas, COUNTY OF Marion, ss.
Billy H. Slusser (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Billy H. Slusser
Box 275 Marion, Kansas
(Address)

Subscribed and Sworn to before me this 1st day of April, 19 68



Mary M. Hein
Notary Public.

15.113.20031.0000

DRILLERS LOG

Company
Contractor
Farm
8 5/8

Art Small
Slusser Drilling Company
Meyer #1
@ 188

Commenced 3-19-68
Completed 3-26-68
NE NW NE 24-20-2W
McPherson County, Kans.

Surface Soil	5	
Sand	75	
Shale	350	
Shale & Lime	825	
Lime & Shale	1470	
Shale & Lime	1783	
Lime & Shale	2045	
Shale & Lime	2085	
Shale	2316	
Lime	2640	
Lime & Shale	2865	
Shale	2913	
Chat & Lime	2974	Rotary T.D.

RECEIVED
STATE CORPORATION COMMISSION
APR 3 1968
CONSERVATION DIVISION
Wichita, Kansas