


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD  
15 009-03483-0000

Barton County. Sec. 9 Twp. 16 Rge. 13 (E) W (W)

Location as "NE/CNW&SW" or footage from lines SE 1/4  
Lease Owner D. H. Cook  
Lease Name Kramer Well No. 27 #27  
Office Address Box 358 Hoisington, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed September 21 19 62  
Application for plugging filed March 23 19 62  
Application for plugging approved March 19 62  
Plugging commenced May 19 62  
Plugging completed May 9 19 62  
Reason for abandonment of well or producing formation No SWD well - almost 100% water -  
If a producing well is abandoned, date of last production Sept. 19 62  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

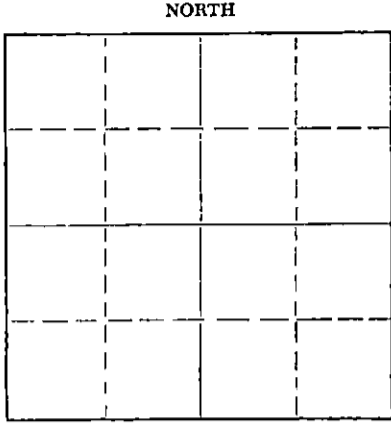

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well D. Truan  
Producing formation Arbuckle Depth to top. 3385 Bottom 3392 Total Depth of Well 3392 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	do not have any original files on this well					
	Total depth		3392'			
	5" casing set at		3385'			
	7" casing set at		3303'			
	(recovered no pipe)					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 500' feet to 0' feet for each plug set.

Total depth of well 3385' - 3250' filled with sand and cement - 6 sacks cement fluid down from top of hole 1400' filled with water and mud to 500' from top.  
500' Built bridge and dumped 6 sacks cement. filled with mud and to 60' of top.  
60' dumped 3 sacks cement and mud to 35' from top.  
35' filled with solid cement to top filled solid 12 1/2" and 7" OD.  
0' -

Cut 5 1/2" and 7" off below ground cellar floor. cut 12 1/2" off below cellar floor filled all with solid cement. filled all space left outside of 12 1/2" to above pipe.

Name of Plugging Contractor Arnett Casing Pulling.  
Address Hoisington, Kansas  
(If additional description is necessary, use BACK of this sheet)

RECEIVED  
STATE CORPORATION COMMISSION

AUG 10 1962

STATE OF Kansas COUNTY OF Barton ss. CONSERVATION DIVISION  
That I D. H. Cook, Owner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Hoisington, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 30<sup>th</sup> day of July, 19 62

My commission expires November 25, 1965 [Signature] Notary Public.



FEDERAL IDENTIFICATION  
48-0180444

**D. H. COOK & CO.**  
OIL WELL AND LEASE SERVICING  
187 WEST 1ST STREET      PHONE 286  
HOISINGTON, KANSAS

15-009-03483-000

KANSAS IDENTIFICATION  
08330-805-133

Kramer Lease Well No <sup>2</sup> 1 #27  
SE $\frac{1}{4}$  Sec. 9, 16s, 13w.  
Barton County, Kansas

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 22 1962  
CONSERVATION DIVISION  
Wichita, Kansas

Well log (available) to be filed with plugging application.

Total depth      3392'  
5" casing set at 3385'  
7" casing set at 3303'