

STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-009-21759-0000

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barton County, Sec. 9 Twp. 16s Rge. 13w E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
NW NE SW


Lease Owner Alvin E. Tipton  
Lease Name Morgenstern Well No. 2  
Office Address Box 157, Hays, Kansas 67601  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

Date Well completed 11-30 1979  
Application for plugging filed 11-30 1979  
Application for plugging approved 11-30 1979  
Plugging commenced 11-30 1979  
Plugging completed 11-30 1979  
Reason for abandonment of well or producing formation  
Dry Hole

If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3395'  
Show depth and thickness of all water, oil and gas formations.

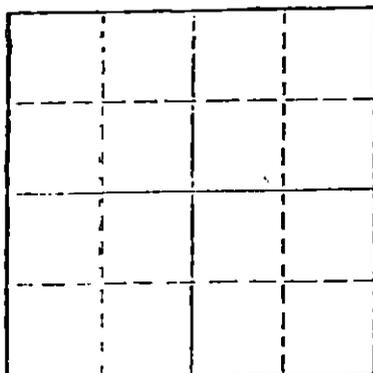

Locate well correctly on above  
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE   | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
|           |         |      |    | 8 5/8" | 254'   | NONE       |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set.

50 sks. @ 480'

25 sks. @ 240'

10 sks. @ 40'

5 sks. in rathole

50/50 Pozmix, 4% Gel. Started @ 2:00 p.m.

Finished @ 3:00 p.m.

12-13-1979

(If additional description is necessary, use BACK of this sheet.)

Name of Plugging Contractor Allen Drilling Company  
P. O. Box 1389, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.  
Allen Drilling Company (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature)

Larry Curtis


P. O. Box 1389, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of December, 19 79

Glenn Nichols

Notary Public.

My commission expires 1-28-1980



15-09-21759-0000

DRILLER'S WELL LOG

DATE COMMENCED: 11-24-79  
DATE COMPLETED: 11-30-79

Alvin E. Tipton  
Morgenstern #2  
NW NE SW, Sec. 9-16s-13w  
Barton County, Kansas

ELEVATIONS 1943' K.B.  
1933' G.L.

FORMATION DATA

886- Anhydrite  
3059-3064' Shale  
3064-3078' Lime  
3078-3092' Lime  
3092-3138' Shale  
3138-3342' Lime  
3342-3390' Lime and Shale  
3390-3395' Dolomite  
3395' T. D.

Anhydrite 886  
Heebner 3059  
Toronto 3078  
Douglas 3092  
Kansas City 3138  
Base Kansas City 3342  
Arbuckle 3390  
T. D. 3395

SURFACE PIPE:

Ran 6 Jts. 8 5/8" Used 28# Casing.  
Set @ 254' w/175 sks. Common,  
2% Gel, 3% c.c. By Sun Cementing.  
Tally 254'. Cement did Circulate.

PLUGGING: 11-30-79

50 sks. @ 480'  
25 sks. @ 240'  
10 sks. @ 40'  
5 sks. in rathole  
50-50 Pozmix, 4% Gel.  
Started @ 2:00 p.m.  
Finished @ 3:00 p.m.

RECEIVED  
STATE GEOLOGICAL COMMISSION

DEC 13 1979

COMMISSION DIVISION  
STATE OF KANSAS

AFFIDAVIT


STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 8th day of December 1979.

Wanda Nichols  
(Notary Public)



My commission Expires: 1-28-1980