


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

McPherson County, Sec 13 Twp 20 Rge. 2W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
SE SE SW

Lease Owner Alfred D. Koehn
Lease Name College Well No. 1
Office Address #2, Box 89, Galva, Kansas 67443
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry

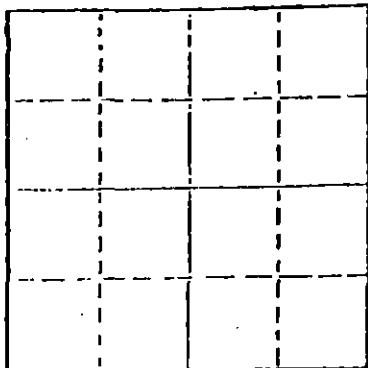

Locate well correctly on above
Section Plot

Date Well completed May 6, 1980 1980
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 19
Plugging completed May 6, 1980 1980
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Clay & Shale		0	100'	8 5/8"	100'	None
Shale		100'	133'	8 5/8"	33'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug at 125' with 20 sacks of cement. Filled with mud to 40' and set plug with 10 sacks of cement, 2 sacks in rathole. Plugging completed ay 5:30 P. M. with State Plugger, Gilbert Toman, Holyrood, Kansas.

STATE RECEIVED
MAY 13 1980
CONSERVATION DIVISION
STATE CORPORATION COMMISSION


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Blackstone Drilling, Inc., Box 1184, McPherson, Kansas 67460

STATE OF Kansas COUNTY OF McPherson, ss.
Alfred D. Koehn (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Alfred D. Koehn
R#2, Box 89, Galva, Kansas 67443
(Address)

SUBSCRIBED AND SWORN TO before me this day of 19

My commission expires Notary Public.



Blackstone Drilling, Inc.

Box 1184 • 523 West Kansas • Phone (316) 241-1250

McPHERSON, KANSAS 67460

May 7, 1980

COMPANY: ALFRED D. KOHN
 CONTRACTOR: BLACKSTONE DRILLING, INC.
 FARM: COLLEGE #1
 LOCATION: SE SE SW Section 13-20-2W,
 McPherson County, Kansas
 COMMENCED: April 30, 1980
 COMPLETED: May 6, 1980
 ELEVATION: 1541 MFB

0	to	100	Clay & Shale
100	to	136	Shale
136	to	1759	Shale & Lime
1759	to	2503	Lime & Shale
2503	to	2805	Lime
2805	to	2931	Shale & Lime
2931	to	2990	Mississippi
		2990	T. D.


Cut 12 1/2" hole to 133' and run 135' of 8 5/8" surface pipe, cemented with 100 sacks of cement at 133'. Plug down at 10:45 A. M., April 30, 1980. Hole dry, and abandoned. Set bottom plug at 125' with 20 sacks of cement. Filled with mud to 40' & set plug with 10 sacks of cement, 2 sacks in rat-hole. Plugging completed at 5:30 P. M., May 6, 1980 by State Plugger, Holyrood, Kansas.

TOPS:


Measurements taken from K. B.


CERTIFICATE

I, P. E. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your- College #1, located on the SE SE SW Section 13-20-2W, McPherson County, Kansas as reflected by the files of Blackstone Drilling, Inc.


 P. E. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 7th day of May, 1980.


 Johnnie L. Schmidt - Notary Public

 **JOHNNIE L. SCHMIDT**
 McPherson County, Kansas
 My Appt. Exp. June 23, 1981

NOTARY PUBLIC
 COMMISSION DIVISION
 KANSAS
 My Commission Expires 6/23/81