


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

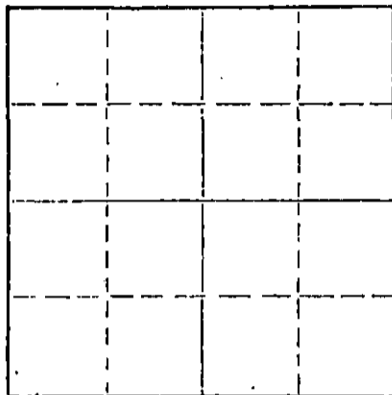

Locate well correctly on above
Section Plat

Rice County, Sec. 5 Twp. 21 Rge. 6 W (E) (W)
Location as "NE/CNWSW" or footage from lines SW SE NE
Lease Owner Northridge Oil Co.
Lease Name Renollett Well No. B-1
Office Address P.O. Box 18271 Denver, Colorado 80218
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 7-28 19 55
Application for plugging filed 11-29 19 72
Application for plugging approved 11-30 19 72
Plugging commenced 12-16 19 72
Plugging completed 12-20 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Tomar
Producing formation Depth to top Bottom Total Depth of Well 3470' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 20 bx of gel and 125bx of cement, with
Halliburton Cementing Co, to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
DEC 26 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN to before me this 21st day of December, 19 72

My commission expires January 5, 1974

Judy Lamb
Notary Public.


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
608 East Murdock, Wichita, Kansas

Company: HENRY BENNETT
Farm: Renollett "B" No. 1

SEC. 5 T. 21 R. 6W
SW SE NE

Total Depth. 3470
Comm. 7-18-55 Comp. 7-28-55
Shot or Treated. Fracked w/ 2500# sand
Contractor. Salina Drilling Corporation, Inc.
Issued. 10-1-55

County Rice KANSAS



Elevation. 1650 DF

Production. 30 BO, 7 BWPD

CASING:

8 5/8 175' w/ 150 sx cmt.
5 1/2 3052' w/ 75 sx cmt.

Figures indicate Stratton of Formations.

sand, surface & clay	30
red bed, shale & shells	670
shale	950
lime & shale	1675
lime	1850
shale & lime	2060
shale & shells	2370
lime	2475
lime & shale	2550
lime	2750
lime & shale	2935
lime	3310
lime & shale	3431
chat & shale	3454
shale	3470
Total Depth	

RTD

TOPS:	
Cherty conglomerate	3431
Mississippi chat	3451

RECEIVED
STATE CORPORATION COMMISSION
NOV 30 1952
CONSERVATION DIVISION
Wichita, Kansas

NO LONGER MAINTAIN A FILE