


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

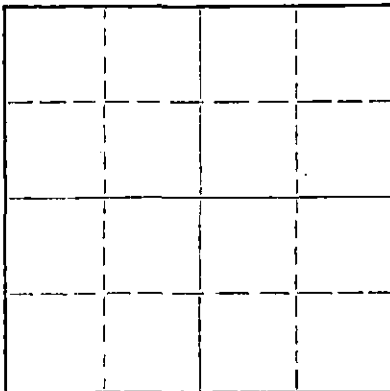

Locate well correctly on above
Section Plat

Rice County, Sec. 5 Twp. 21 Rge. 6 W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SE

Lease Owner Pat SimmonsLease Name EngallandWell No. 2Office Address 5252 North Broadway, Wichita, KansasCharacter of Well (completed as Oil, Gas or Dry Hole) oilDate well completed 6-15 19 69Application for plugging filed 12-24 19 69Application for plugging approved 12-26 19 69Plugging commenced 12-29 19 69Plugging completed 12-31 19 69

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19Was permission obtained from the Conservation Division or its agents before plugging was commenced? YesName of Conservation Agent who supervised plugging of this well Gilbert TomanProducing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3508' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2		2,545'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3508' to 3490'. Dumped 5 sx of cement. Mudded hole to 165'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
JAN 5 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.Address 2809 King St. Hutchinson, Kansas 67501STATE OF Kansas, COUNTY OF Reno, ss.Art Lamb

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb2809 King St. Hutchinson, Kansas 67501

(Address)

SUBSCRIBED AND SWORN to before me this 31st day of December, 19 69My commission expires January 5, 1970

Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY

15.159.01480.0000

Company. H. C. BENNETT
Farm. Engolland

No. 2

SEC. 5
N. NW SE

T. 21

R. 6W

Total Depth. 3508

Comm. 6-6-49

Comp. 6-15-49


County Rice

KANSAS

Shot or Treated.

Contractor.

Issued. 10-20-51



CASING:
8 5/8" 155'
7" 3015' ?

Elevation. 1659

Production. 8 bbls. / 10% wtr

Figures Indicate Bottom of Formations.

sand	30
shale	95
shale & shells	130
rod rock, shale & shells	450
shale, sand rod rock	610
shale, rod rock	690
shale	810
salt	1030
shale	1190
shale & shells	1330
lime & shale	2650
lime	3175
lime & shale	3215
lime	3465
congl.	3470
chert Miss.	3472
chert Miss.	3508
Total Depth	

Tops:	
Congl.	3464
Mississippi	3470

RECEIVED
STATE CORPORATION COMMISSION
JUN 23 1956
CONSERVATION DIVISION
Wichita, Kansas