

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas


WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH



Locate well correctly on above
Section Flat

County. Sec. 11 Twp. 21S Rge. 17 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW $\frac{1}{2}$ NW $\frac{1}{2}$ NE $\frac{1}{4}$
Lease Owner H. H. & B. Drilling Co., Inc., et al
Lease Name Stueckemann Well No. 1
Office Address 705 Petroleum Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 8-14 19 47
Application for plugging filed 8-14 19 47
Application for plugging approved 8-14 19 47
Plugging commenced 8-14 19 47
Plugging completed 8-14 19 47
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production -- 19 --
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr, P. O. Box 207, Gt. Bend, Kansas
Producing formation none Depth to top -- Bottom -- Total Depth of Well 3942 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				<u>8-5/8"</u>		
				<u>Surface - 8" RP</u>		
				<u>Sm. S.</u>		<u>none</u>
				<u>Oil String</u>	<u>none run</u>	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Laid down drill pipe, plugged hole, 15 sacks on bottom plug at bottom of surface - 1070'; 10 sacks on top plug, topplug set @ 35'.

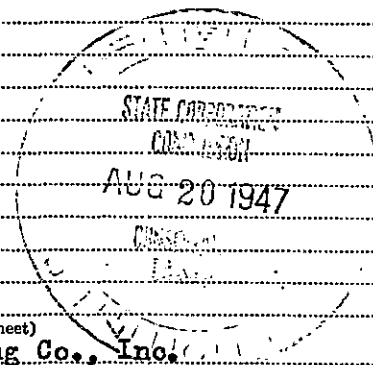

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to H. H. & B. Drilling Co., Inc.
Address 705 Petroleum Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Richard Hindery (employee of ~~owner~~ of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard Hindery
Richard Hindery, Treas., H. H. & B. Drilling Co., Inc.
705 Petroleum Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of August, 19 47.
My Commission Expires February 23, 1951
Pauline Arnett
Notary Public.

My commission expires _____

21-6858-RS 2-47-6M

PLUGGING
FILE SEC-11-T-21-R-17-N
BOOK PAGE 126 LINE 42

STUECKEMANN WELL NO. 1

Location: Approx. Ctr. NW 1/4 NE 1/4 Sec. 11-21S-17W Spudded: 7-29-47
 Pawnee County, Kansas

Operator: H H & B Drilling Co., Inc. Oil String Cemented: none

Contractor: H H & B Drilling Co., Inc. Total Depth: 3942'

Casing Record: Surface Casing - 46 jts. or 1082' 8-5/8" Elevation: 2035 KB
 H.T. Cemented @ 1089 w/375 sacks Bulk cement & 3 CC 2033 DF

Oil String - none run
 Abandoned - 8-14-47

T O P S (KB)

Anhydrite	1058
Heebner	3435
Base Oread	3465
White Lansing	3531
Marathon Chert	3815
Conglomerate	3854
Arbuckle	3892 (-1857)

L O G

(Figures indicate bottom of formation)

Clay and shale	0 to 79
Clay, shale and sand	434
Clay and shale	475
Sand	615
Shale and red bed	1058
Anhydrite	1075
Anhydrite (shale and shells)	1283
Shale and red bed	1500
Shale and salt	1805
Shale and shells	1905
Lime and shale	2180
Lime	2260
Lime and shale	3250
Lime	3295
Lime and shale	3525
Lime	3825
Lime, shale and chert	3843
Lime and shale	3860
Lime, shale and chert	3878
Lime, shale, chert	3902
Lime	3942
Total Depth	3942

15.145.00413.0000
 20 1947

The undersigned, H H & B Drilling Co., Inc., hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

H H & B DRILLING CO., INC.

BY: Richard Lindery

Subscribed and sworn to before me this 18th day of August, 1947.

Pauline Arnett
Notary PublicMy commission expires: ~~Feb 2, 1949~~

My Commission Expires February 25, 1951

