

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-083-21,357.0000

LEASE NAME Stacy

WELL NUMBER 1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4950 Ft. from S Section Line

660 Ft. from E Section Line

SEC. 19 TWP. 21 RGE. 26 ~~xxx~~ or (W)

COUNTY Hodgeman

LEASE OPERATOR Bird Energy, Inc.

ADDRESS P.O. Box 1612 Dodge City, Ks 67801

PHONE# (316) 227-6041 OPERATORS LICENSE NO. 6574

Date Well Completed 11-21-90

Character of Well D&A

Plugging Commenced 11-21-90

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 11-21-90

The plugging proposal was approved on 11-19-90 (date)

by C. Morris (KCC District Agent's Name).

to be filed

Is ACO-1 filed? by operator If not, is well log attached? yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 4560'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ___ feet to ___ feet each set.

Bottom Plug: @ 1755' w/50 sacks cement thru drill pipe
 Next Plug: @ 875' w/50 " " " " "
 Next Plug: @ 290' w/50 " " " " "
 Top Plug: @ 40' w/10 " " " " "

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Duke Drilling Co., Inc. License No. 5929

Address P.O. Box 823 Great Bend, KS 67530

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: BIRD ENERGY Bird Energy, Inc.

STATE OF Kansas COUNTY OF Barton, ss.

Jay Schneider

NOV 27 1990

(Employee of Operator) or ~~Operator~~ of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and have read the log of the above described well as filed that the same are true and correct, so help me God, Kansas

(Signature) [Signature]

(Address) P.O. Box 823 Great Bend, KS 67530



DOROTHY M. HOGUE
NOTARY PUBLIC
STATE OF KANSAS
My Appt. Exp. 5-29-94

SUBSCRIBED AND SWORN TO before me this 26 day of November, 1990

Dorothy M. Hogue
Notary Public

My Commission Expires: 5-29-94

DRILLER'S WELL LOG

DATE COMMENCED: November 15, 1990
DATE COMPLETED: November 21, 1990

Bird Energy, Inc.
STACY #1
N/2 NE NE
Sec. 19, T21S, R26W
Hodgeman County, Ks.

0 - 778' Surface Soil, Clay, Shale
778 - 1200' Lime & Shale
1200 - 1420' Sand
1420 - 1713' Lime & Shale
1713 - 1742' Anhydrite
1742 - 3700' Lime & Shale
3700 - 4560' Shale & Lime
4560' RTD


ELEVATION: 2504' K.B.

Surface Pipe: Set used
8-5/8", 20# pipe @260'
w/160 sacks 60/40 pozmix
2% gel 3% cc.


A F F I D A V I T


STATE OF KANSAS
COUNTY OF BARTON)ss

Jay Schneider of lawful age, does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

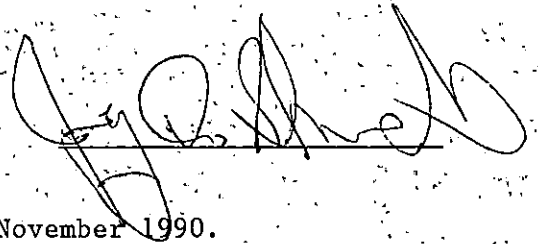

Subscribed and sworn to before me this 26 day of November 1990.


Notary Public
ST. NECORPORATE AND CONSERVATION



NOV 27 1990

CONSERVATION DIVISION
Wichita, Kansas