


DISTRICT CONSERVATION AGENT'S REPORT

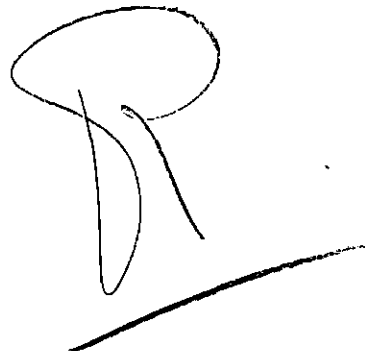

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 61-38

LOCATION NE-SE-7W

SEC. 2a TWP. 21 RGE. 12-4

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 2 Lease Carroll

Operator Musgrave Petro Co. Address 407 K.F.H. Bldg. Wichita-Kans.

Field _____ County Stafford

Total Depth 3577 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8 - 325 ft. Circulated with cement
5 1/2 casing set at 3564 ft. 75 sacks of cement
Plugged back to 3440 ft. with chat. Dumped sacks
of cement at 3440 ft. Shut off & pulled the casing
Mud to 300 ft. Bit Rock Bridge & 15 sacks of
cement at 300 ft. mud to 35 ft. Bridge &
15 sacks of cement at the surface

RECEIVED
STATE CORPORATION COMMISSION
AUG 27 1951
C. McStough -
District Conservation Agent

PLUGGING
FILE SEC 20 T 21 R 12W
BOOK PAGE 61 LINE 28

Date 8-24-51