


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

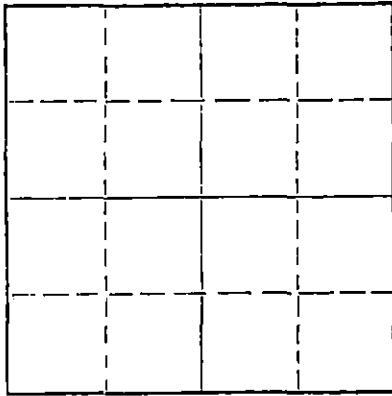

Locate well correctly on above
Section Plat

Rice

County, Sec. 15 Twp. 21S Rge. 6W ~~XXX~~ ~~XXX~~

Location as "NE/CNW/SW" or footage from lines Approx. 75' SE of SW SW NW

Lease Owner Commercial Oil, Inc.

Lease Name Country Club

Well No. 1

Office Address 5252 North Broadway- Wichita, Kansas 67219

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 30, 1970

Application for plugging filed Verbal Application 19

Application for plugging approved Verbal Approval 19

Plugging commenced December 30, 1970

Plugging completed December 30, 1970

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3,536 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	168'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 3,536 feet (rotary total depth) to 150 feet. Set bottom plug at 150 feet and cemented with 25 sacks cement. Filled hole with heavy rotary mud from 150 feet to 40 feet. Set solid plug at 40 feet and cemented with 10 sacks cement plus 1/2 sack hulls, 2 sacks cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION

JAN 11 1971

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.

Address 200 North Main - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dean Britting, Agent

(Employer of owner ~~XXX~~ ~~XXXXXXXXXXXX~~) of the above-described well, being ~~XXX~~ ~~XXXXXXXXXXXX~~ sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

200 North Main - Wichita, Kansas 67202


(Address)

Subscribed and sworn to before me this 7th day of January, 1971

Elsie Willison
Elsie Willison

Notary Public.

My commission expires June 30, 1974



KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

15.159.20351.0000

COMPANY Commercial Oil, Inc.

SEC. 15 T. 21S R. 6W
LOC. Approx. 75' SE of
SW SW NW

FARM Country Club NO. 1

COUNTY Rice

TOTAL DEPTH 3,536'
COMM. Dec. 17, 1970
SHOT OR TREATED
CONTRACTOR H-30, Inc.
ISSUED

COMP. Dec. 30, 1970

KANSAS

CASING

20	10
15	8-5/8" 168' cemented w/185 sxs cement
12	6
13	5

ELEVATION 1659 KB

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Red Bed	168'
Shale	885'
Shale and Shells	1105'
Shale and Lime	1355'
Lime and Shale	1640'
Shale and Shells	2080'
Shale and Lime	2425'
Lime and Shale	2693'
Shale and Lime	2905'
Lime	3468'
Lime and Shale	3520'
Lime	3536'
Rotary Total Depth	3536'

RECEIVED
STATE CORPORATION COMMISSION
JAN 11 1971
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the above and foregoing to be
a true and correct log of the above described well
as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas

County of Sedgwick


} SS:

Subscribed and Sworn to before me a Notary Public
and for said county and state this 7th. day of
January, 1971.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:

June 30, 1974



PLUGGING SUMMARYDATE December 30, 1970OWNER Commercial Oil CompanyADDRESS 5252 N. Broadway Wichita, KansasFARM Country ClubWELL NO. Well No. 1LOCATION SW SW NW Sec. 15-21S-6WCOUNTY RiceTD. 3536'

OIL _____

PLUGGING CONTRACTOR H-30, Inc. - Bob Herren

NUMBER _____

ADDRESS _____

PUSHER _____

ADDRESS _____

HOW PLUGGED 8 5/8" 169' Cwccemented with 185 sacks cement
fill hole with mud to 160' set plug with25 sacks cement-mud to 40' - plug-cappedwith 10 sacks cement.Bew H.