

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

KIOWA

County. Sec. 3 Twp. 30S Rge. 17W (E) W (W)

Location as "NE/CNW<sup>1</sup>/<sub>4</sub>SW<sup>4</sup>" or footage from lines NW SE

Lease Owner Gulf Oil Corp.

Lease Name ROBBINS Well No. 1

Office Address Gulf Bldg., Box 661, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Plugged - Dry Hole

Date well completed 1-13-60 19

Application for plugging filed 1-12-60 19

Application for plugging approved 1-12-60 19


Plugging commenced 1-13-60 19

Plugging completed 8 a.m. 1-13-60 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

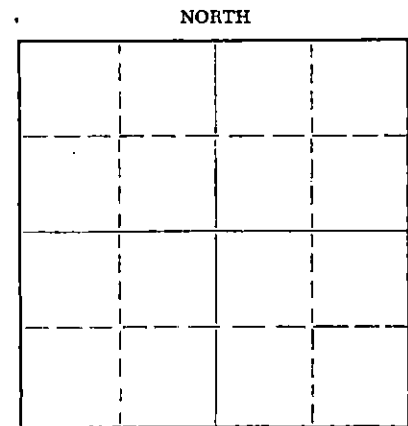

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp, Stafford, Kansas

Producing formation  Depth to top  Bottom  Total Depth of Well  Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	550.23'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from  feet to  feet for each plug set.

Plugged.  
Filled hole with heavy mud from 4890' up to 450' - 1/3 sx hulls, Halliburton plug & 35 sx cement through drill pipe. Pumped in by Halliburton. Filled hole to 35' with heavy mud - 1/2 sx hulls, Halliburton plug - 12 sx cement to cellar zero. 3 sx cement in rat hole.  
Job completed - 8 a.m. 1-13-60 / W. L. Lackamp, Stafford

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sierra Petroleum Co., Inc.

Address Box 232, Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.

C. I. Honaker, Drilling Superintendent (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. I. Honaker

(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of January, 1960

My commission expires 10-17-63

Geroy D. [Signature] Notary Public.



Gulf Oil Corp. - Operator

ROBBINS #1  
NW SE - 3-30S-17W  
Kiowa County, Kansas

Elev: 2069 K.B.  
I.D.: 4890'

Commenced: 12-19-59  
Completed: 1-13-60

Casing:

Cement:

8-5/8" @ 550.23'

w/ 450 sx cement

FORMATION

DEPTH

Surface Clay	40'
Shale & sand	80'
Red Bed	344'
Anhydrite	362'
Red Bed	660'
Shale & Shells	870'
Shale & Shells	1930'
Lime & Shale	4259'
Lime	4667'
Lime & Shale	4691'
Lime	4778'
Lime & Shale	4850'
Chert	4864'
Mississippi	4890'

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 15 1960  
CONSERVATION DIVISION  
Wichita, Kansas

TOPS:	Heebner	4053'
	Brown Lime	4216'
	Lans. K.C.	4234'
	Mississippi	4850'

STATE OF KANSAS    )  
County of RUSSELL    ) ss:

I hereby certify that the above information is true and correct to the best of my knowledge.

C. P. Hensler

Subscribed and sworn to before me this 14th day of January, 1960.

Leroy King  
Notary Public

My commission expires: 10-17-63