


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rice County: Sec. 3 Twp. 21 Rge. 6W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NE SW
Lease Owner Commercial Oil Co.
Lease Name Rainey Well No. 6
Office Address 5252 North Broadway, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 9-25 1947
Application for plugging filed 7-15 1970
Application for plugging approved 7-16 1970
Plugging commenced 7-20 1970
Plugging completed 7-22 1970
Reason for abandonment of well or producing formation _____

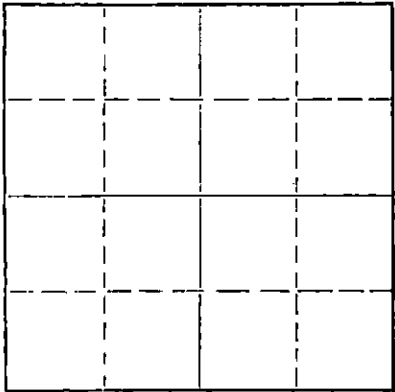

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3419' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"		2,504'
<p>RECEIVED STATE CORPORATION COMMISSION JUL 24 1970 CONSERVATION DIVISION Wichita, Kansas</p>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3419' to 3375'. Dumped 6 sz of cement. Mudded hole to 215'. Made 15' of rock bridge. Dumped 6 Yrds. of Ready Mix Cement, filling to the bottom of the collar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: _____
Address _____

STATE OF Kansas, COUNTY OF Reno, ss.
West Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) West Lamb
2809 King Hutchinson, KS (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of July, 1970

My commission expires Jan 5, 1974 Judy Lamb Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

COPY


15.159.04110.0000

Company - H. C. BENNETT
Farm - Rainey No. 6

SEC. 3 T. 21 S. 6W
NW NE SW

Total Depth. 3419'
Comm. 9-6-47 Comp. 9-25-47
Shot or Treated.
Contractor.
Issued. 11-22-47

County. Rice
KANSAS



CASING:
10-3/4" 123' Com. w/140 sx
7" 3491' Com. w/ 75 sx

Elevation. _____

Production. Est. 50 bbls oil

Figures indicate Bottom of Formations.

sand, red bed & shale	145
shale & shells	750
salt & shale	875
lime & shale	965
shale & shells	1035
lime & shale	1150
lime	1160
shale & lime	2170
shale & shells	2220
lime & shale	2290
lime, shells & shale	2385
lime sticky & shale	2430
lime	2610
lime & shale	2620
shale sdy, sand & lime	2740
lime & shale	2750
lime	2798
lime & shale	2805
lime	2830
lime & shale	2940
shale & shells	2969
lime & shale	2989
lime	3305
lime & shale	3396
conglomerate	3400
chat	3419
Total Depth	

Tops:	
Conglomerate	3386
Mississippian	3403

RECEIVED
STATE CORPORATION COMMISSION
JUL 17 1970
CONSERVATION DIVISION
Wichita, Kansas

X