

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

FINNEY County. Sec. 2 Twp. 21S Rge. 33W (E) (W)

Location as "NE/CNW/SE/SW" or footage from lines 1250' N of S & 1250' W of E Lines

Lease Owner SHALLOW WATER REFINING COMPANY

Lease Name BEACH 2 Well No. 1

Office Address 4534 WORNALL ROAD, KANSAS CITY, MISSOURI

Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE

Date well completed JANUARY 2, 1962

Application for plugging filed JANUARY 4, 1962

Application for plugging approved JANUARY 4, 1962


Plugging commenced JANUARY 4, 1962

Plugging completed JANUARY 4, 1962

Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

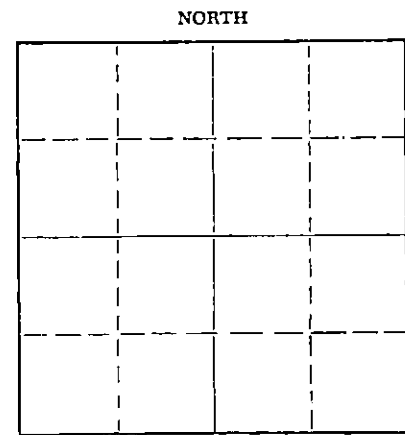

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. LACKAMP, JR., R.R. #1, STAFFORD, KANSAS

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2715 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>SURF. SOIL, CLAY, SAND & SHALE</u>	<u>SURF. CSG.</u>	<u>-0-</u>	<u>217'</u>	<u>8-5/8"</u>	<u>217'</u>	<u>NONE</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED: HEAVY MUD TO 210', PLUG & 3 GAL. HULLS, ROLLED IN SACK, 20 SX. CEMENT THROUGH DRILL PIPE. MUD TO 35', PLUG & HULLS IN SACK, THEN 10 SX. CEMENT TO BOTTOM OF CELLAR.
JOB COMPLETED AT 5 P.M., 1-4-62.

Handwritten notes and stamps:
JAN 9 1962
1-9-62
CONSERVATION DIVISION
Wichita

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SIERRA PETROLEUM CO., INC.

Address 208 PETROLEUM BUILDING, WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF RUSSELL, ss.

C. T. HONAKER (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Honaker G. T. HONAKER
DRILLING SUPERINTENDENT

(Address)

SUBSCRIBED AND SWORN TO before me this 8TH day of JANUARY, 1962

Jerry Dietz
Notary Public.

My commission expires 10-17-63



SHALLOW WATER REFINING COMPANY - Operator
SIERRA PETROLEUM CO., INC. - Contractor

T. D.: 2715'

BEACH 2 #1
1250' North of South Line
1250' West of East Line
Sec. 2-21S-33W
Finney County, Kansas

Commenced: 12-29-61
Completed: 1-2-62

Casing:

8-5/8" Set at 217'

Cement:

with 200 sx. cement

FORMATION

DEPTH

Surface Soil & Clay	30
Sand & Shale	217
Shale	500
Shale & Shells	1100
Shale, Gypsum & Red Bed	1350
Red Bed, Shale & Lime	1545
Red Bed	1596
Anhydrite	1615
Red Bed & Shale	1970
Shale & Lime	2115
Lime	2132
Shale	2295
Lime & Shale	2715

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

DEPT. OF REVENUE
STATE OF KANSAS COMMISSION
JAN 9 1962
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above information is true
and correct to the best of my knowledge.

A.T. Honaker

Subscribed and sworn to before me this 8th day of January,
1962.

Lesoy Dietz
Notary Public

My commission expires: 10-17-63