


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

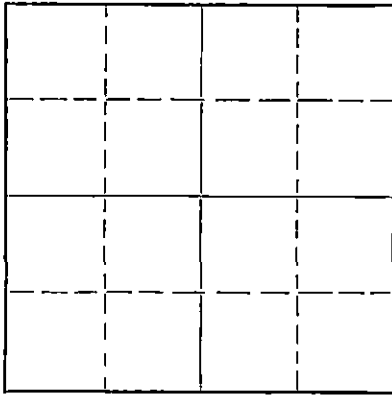

Locate well correctly on above
Section Plot

Hodgeman County. Sec. 30 Twp. 21 Rge. 25 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NE SE
Lease Owner D. R. Lauck Oil Company Inc. & North American
Lease Name Sinclair #1 Well No. Car Corp.
Office Address 301 South Broadway Wichita 2 Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed September 7 19 51
Application for plugging filed September 7 19 51
Application for plugging approved September 7 19 51
Plugging commenced September 7 19 51
Plugging completed September 7 19 51
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation none Depth to top Bottom Total Depth of Well 4520 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	water	60	70	10 3/4	160	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

mud 4520 - 160
cement plug 160 - 140
mud 140 - 25
cement 25 - bottom of cellar

9-14-1951

SEP 14 1951

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to D. R. Lauck Oil Company Inc.
Address 301 South Broadway Wichita 2 Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
James F. Ralstin (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) *James F. Ralstin*
Wichita Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of September, 19 41

E. Elizabeth Gay
Notary Public.

My commission expires Sept. 14, 1951

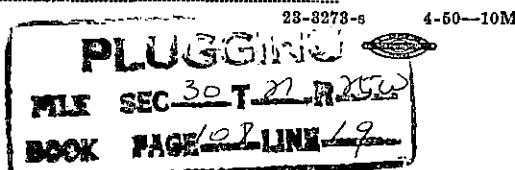

D. R. Lauck Oil Company Inc. and North American Car Corporation

Sinclair #1

NW NE SE

Sec. 30-21-25W

Hodgeman County Kansas

Commenced August 18, 1951

Completed Sept. 7, 1951

Elevation: 2426 DF

2428 Kelly Bushing

D & A

160' 10 3/4" surface cemented with 130 sacks

shale	60
sand	70
shale & shells	160
shale	260
sand	275
shale	675
sand	695
shale & red bed	840
sand	850
red bed & shale	1615
Anhydrite	1645
shale & shells	2185
shale & salt	2240
shale & lime	3595
lime	4520

Tops - Heebner	3746
1st Limestone	3785
Lansing	3823
Marmaton	4187
Mississippi	4411
T.D.	4520

DST 4245-4305 open 1 hr
 rec. 30' mud 24' OCM
 BHP 760'

PLUGGING
 WFL SEC 30-21-25W
 BLOCK PAGE 108 LINE 19

RECEIVED
 STATE COMMISSION
 SEP 14 1951
 CC