

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 17 Twp. 21S Rge. (E) 19W(W)

Location as "NE/CNW/SW" or footage from lines C NW NW
Lease Owner Pickrell Drilling Company
Lease Name Reece "B" Well No. 1
Office Address 705 Fourth Nat'l Bank Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 12, 1968
Application for plugging filed February 12, 1968
Application for plugging approved February 15, 1968
Plugging commenced February 15, 1968
Plugging completed February 15, 1968
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation Depth to top Bottom Total Depth of Well 4310 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	274'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 500'. Set plug. Cemented with 70 sacks
cement. Heavy mud to 270'. Set plug. Cemented with
20 sacks cement. Heavy mud to 40'. Set plug. Cemented
to bottom of cellar with 10 sacks cement. Plugged rat hole
with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
FEB 26 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. Sebitts


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts, Partner & Attorney-in-Fact
705 4th Nat'l Bk Bldg., Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 21st day of February, 1968

L. M. Whiting
Notary Public.

My commission expires May 10, 1970

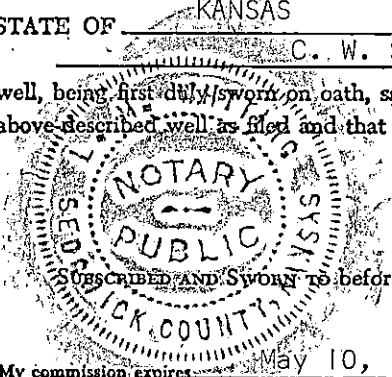

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 4th National Bank Bldg.
Wichita, Kansas 67202

Rotary Drilling Commenced 2/2/68

Rotary Drilling Completed 2/12/68

LOCATION: Reece "B" No. 1
C NW NW Section 17-21S-19W
Pawnee County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (14 jts.) 8 5/8" surface casing set at 274' with 160 sacks cement.
Circ. Complete 6:45 PM, February 2, 1968. No oil string was run.
D. & A., plugged February 12, 1968.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

40	Top Soil & Clay	<u>C. F. S.</u>
700	Shale & Shells	3950'
830	Snad	3988'
905	Shale & Sand Streaks	4000'
1254	Shale, Shells & Red Beds	4020'
1286	Anhydrite	4025'
1400	Shale & Shells	4207'
2080	Shale	4220'
2315	Lime & Shale	4228'
2450	Lime	4240'
3810	Lime & Shale	4255'
3945	Lime	4260'
3953	Lime & Shale	4275'
4070	Lime	4285'
4215	Lime & Shale	4310'
4260	Sand	
4275	Sand & Lime	
4310	Chert, RTD	

RECEIVED
STATE CORPORATION COMMISSION
FEB 26 1968
CONSERVATION DIVISION
Wichita, Kansas

Slope Tests
3000'
3500'
4000'

S. L. M.
Board 3958.89'
Strap 3957.73'
Diff. 1.16'

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
C. W. Sebitts, Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 12 day of February, 1968, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires May 10, 1970.

[Signature]
Notary Public
L. M. Whiting