


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH

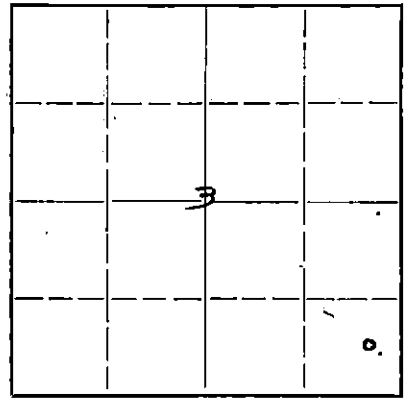

Locate well correctly on above
Section Plot

Rice County, Sec. 3 Twp. 21 Rge. 9C (X) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C E 1/2 SE SE
Lease Owner Donald T. Ingling, Trustee
Lease Name Jeter Well No. 1
Office Address 708-4th Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed August 31 1942
Application for plugging filed August 20 1942
Application for plugging approved August 21 1942
Plugging commenced August 31 1942
Plugging completed August 31 1942
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3355 Feet

Show depth and thickness of all water, oil and gas formations.
OIL, GAS OR WATER RECORDS CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	97' 5"	none
				4 1/2"	3346' 11"	1324' 9"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Casing was shot at 3000', 2603', 2522',
2343', 2020', 1811', 1625', 1512', 1402'
and 1305'

Circulated and worked pipe for three
days. Also spotted oil behind casing,
then filled hole with mud and cemented
surface pipe with 14 sacks of cement.

5-4-43

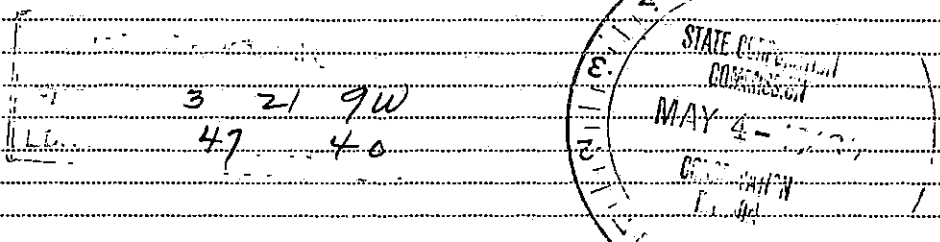

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Donald T. Ingling, Trustee
Address 708-4th Nat'l Bk. Bldg., Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.

Donald T. Ingling (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) Ingling & Parker
Donald T. Ingling 4/30/43
708-4th Nat'l Bk. Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of May 1943
Jeannette Evans Notary Public

My commission expires Mar. 21, 1945

J-TRIP NO. 1 - WELL LOG

#

Donald T. Ingling, Trustee -
Lease Owner

SEC. 3, T 21S, R9W

Ingling & Parker - Contractors

Location - C E $\frac{1}{2}$ S $\frac{1}{2}$ SE $\frac{1}{4}$

Total Depth - 3355' (Rotary)

County - Rice

Commenced - November 3, 1941

State - Kansas

Completed - December 2, 1941

Elevation - 1674'

Casing - 97'5" of 6-5/8" O.D.
3346'11" 4-1/2" O.D.

Production - Salt Water

(Figures below indicate bottom of formation)

Sand	45	Broken lime	2665
Redrock and shells	97	Lime	2705
Redrock and shale	240	Shale and lime	2924
Anhydrite	275	Lime	3002
Shale and shells	350	Broken lime	3030
Shale	590	Lime	3095
Shale and shells	780	broken lime	3125
Salt and shale	1040	Lime	3195
Shale, hard lime and shells	1215	Lime and shale	3285
Broken lime and shale	1278	Lime	3345
Sandy lime	1300	(Cored 3289-3296)	
Shale	1305	Green shale	3345
Shale and lime	1410	Shale - Simpson	3549
Shale and shells	1495	Lime - sand	3355 TD
Lime and shale	1535		Rotary
Lime	1575	(Cored Simpson sand 3345 to	
Shale	1620	Saltwater when drilled shoe.	
Shale and lime	2320		
Shale	2305		
Lime and shale	2445		
Redrock, shale & lime	2461		
Lime (broken)	2515		
Lime	2585		

We hereby certify that this is a true and correct log of the above well.

INGLING & PARKER

By D. Ingling

STATE OF KANSAS)
COUNTY OF SEDGWICK) ss.

Subscribed and sworn to before me this 26th day of May, 1942.

My commission expires:

Oct. 21, 1944

L. Rebecca W. Road
Notary Public