


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Hodgeman SEC. 12 TWP. 21 RGE 23 xx E/W
Location as in quarters or footage from lines:
990' ESL & 990' FEL of SE/4

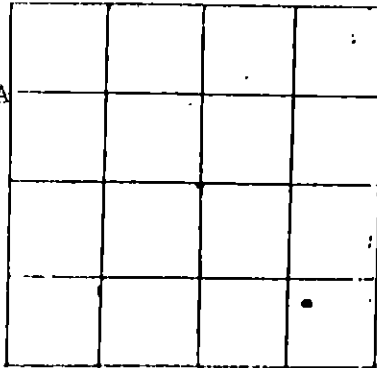

Locate Well
correctly on above
Section Plat.

Lease Owner Phillips Petroleum Company
Lease Name Hays-AB Well No. 2
Office Address Box 287, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole): Dryhole
Date Well Completed July 29, 1983
Application for plugging filed July 29, 1983
Plugging commenced July 29, 1983
Plugging completed July 29, 1983
Reason for abandonment of well or producing formation Dryhole

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dist.#1

Producing formation _____ Depth to top _____ bottom T.D. 4518'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface	Water	0'	1202'	8 5/8"	1193.26'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from _____ feet
to _____ feet for each plug set. MIRU Sun Oilwell cementing. Spot 50

sx 60-40 Pozmix w/2% gel, 3% cacl, 14.7# slurry @ 4468'
Spot 40 sx 60-40 Poz w/2% gel, 3% CaCl, plug @ 1550'
Spot 40 sx 60-40 Poz w/2% gel, 3% CaCl, plug @ 1240'
Spot 40 sx 60-40 Poz w/2% gel, 3% CaCl, plug @ 620'
Made solid bridge @ 40' RKB. Spot 10 sx 60-40 Poz w/2% gel, 3% CaCl @ 14.7# per gal.
Plug rat hole w/15 sx 60-40 Poz w/2% gel & 3% CaCl. Pulled BOP. RDMO Sun.
To weld plate on 8 5/8" csg. Well P&A 7-29-83 as per recommendations of State
Agent (Dist #1)


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oilwell Cementing Company
Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.

C. D. Dohrer (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) C. D. Dohrer Mgr.
Box 287, Great Bend, Kansas 67530
(Address)



SUBSCRIBED AND SWORN TO before me this 1st day of August, 1983

Velma L. Mog Notary Public.

My Commission expires: February 15, 1984

RECEIVED
STATE CORPORATION COMMISSION

AUG 03 1983

CONSERVATION DIVISION
Wichita, Kansas