


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

NORTH

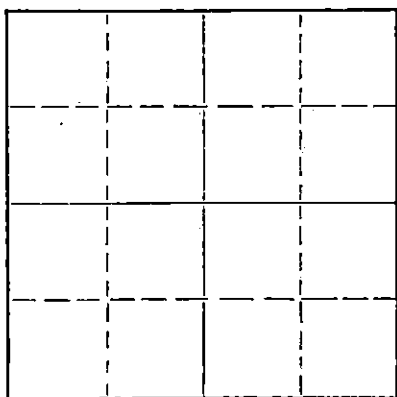

Locate well correctly on above Section Flat

Stafford County, Sec. 3 Twp. 21 Rge. 12 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines NW NW NE
Lease Owner Tnger Oil Co.
Lease Name Wolf #2 Well No.
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2-1-60 19
Plugging completed 2-6-60 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation Depth to top Bottom Total Depth of Well 3434 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	253'	none
				5-1/2"	3427'	2707'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked the hole to 3430' and found it open.
Filled w/sand to 3390' and dumped 5 sacks of cement with bailer. Pulled 5 1/2" casing.
Cleared hole and bailed hole to 250', set rock bridge to 240' and dumped 20 sacks of cement. Mudded the hole to 35', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETED

RECEIVED
STATE CORPORATION COMMISSION

FEB 11 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF KANSAS COUNTY OF RICE, ss.
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of February, 1960

Thomas V. Duggs
Notary Public.

My commission expires 9-27-60




WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company - E. H. ADAIR OIL CO.
Farm - Wolf No. 2

SEC. 3 T. 21 R. 12W
NW NW NE

Total Depth. 5445
Comm. 12-10-49 Comp. 12-19-49
Shot or Treated.
Contractor.
issued. 3-4-50

County. Stafford
KANSAS



Elevation. _____

Production. Swbd 4 bbls pr hr.

CASING:

8 5/8" 253' cem w/160 sx.
5 1/2" 3427' cem w/100 sx.

Figures Indicate Bottom of Formations.

sand	195
shale	610
anhydrite	640
shale	1050
shale, shells	1235
shale	1406
lime	1675
shale, shells	1845
lime	1966
shale, shells	2210
shale	2330
lime	2345
shale	2772
lime	3406
lime RTD	3429
lime	3443
Total depth	
Tops: Drillers:	
Kansas City	3199
Arbuckle	3425 1/2

Rotary total depth 3427'

Tops; Sample; Corr to D.F.

Heebner shale	3050
Brown lime	3180
Lansing K.C. lime	3188
No cherty conglomerate	
Simpson shale	3174
Arbuckle dolomite	5435

RECEIVED
CONSERVATION COMMISSION

FEB 11 1960

CONSERVATION DIVISION
Wichita, Kansas