

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-145-10157-0000 Form CP-4

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

Pawnee County, Sec. 32 Twp. 23 Rge. 15 (E) (W) X

Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner Braden - Deem, Inc.
Lease Name Baumann Well No. 1
Office Address 200 East First Suite 520 Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed May 4, 1970 19____
Application for plugging approved May 5, 1970 19____
Plugging commenced May 25, 1970 19____
Plugging completed May 28, 1970 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well LEO MASSEY
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4750 Feet

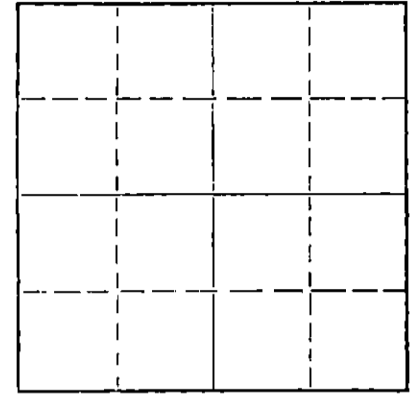


Locate well correctly on above Section Plat

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	205	None
				4 1/2	None	1976'.57

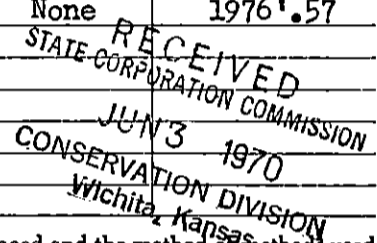

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method of methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Loaded unit and moved into location, set in unit, raised pole and drove stakes. Dug cellar and unpacked braden head. Set in sills, jacks and spiders. Took slips out of head and worked pipe, had 18" tension at 1,600 psi on gauge.

Picked up sand and cement to plug off bottom. Called water hauler to pump load of water to kill gas. Sanded to 2580' and dumped 3 sacks of cement. Shot casing at 1957', casing loose. Starting to lay down casing, laid down 55 joints of 4 1/2" casing.

Finished laying down casing, total 62 joints of 4 1/2". Loaded out trailer. Cleaned out cellar, cut off head and welder welded on collar. Loaded unit.


Allied squeezed well with 2 sacks of hulls, 15 sacks of mud and 100 sacks of 50/50 pozmix cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.

James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 2 day of June, 19 70

My commission expires May 27, 1973 Notary Public.

15-145-10157-0000

RECEIVED
STATE CORPORATION COMMISSION
MAY 5 1970
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

OPERATOR: Dunne-Gardner Drilling Co., Inc.
300 Schweiter Building, Wichita 2, Kansas

LEASE: Baumann

WELL: No. 1

LOCATION: SE NW SE Section 32-23S-15W
Pawnee County, Kansas

CONTRACTOR: Dunne-Gardner Drilling Co., Inc.

DATE COMMENCED: June 25, 1961

DATE COMPLETED: July 7, 1961

TOTAL DEPTH: 4150'

CASING: Set 8-5/8" surface pipe at 205' w/190 sacks cement
Set 4 1/2" casing at 4150'

<u>FROM</u>	<u>TO</u>	
0	125	Sand and Shale
125	205	Shale
205	400	Shale and Shells
400	440	Salt and Shale
440	945	Shale and Shells
945	985	Anhydrite
985	1300	Shale and Red Bed
1300	1750	Shale
1750	1925	Shale and Shells
1925	3275	Lime and Shale
3275	4150	Lime
4150		Total Depth


I certify the above to be true and correct to the best of my knowledge and belief.

DUNNE-GARDNER DRILLING CO., INC.

By 
Don Gardner

Subscribed and sworn to before me this 1st day of April, 1963.

My Commission Expires:
November 9, 1965


Marilyn E. Fox, Notary Public