


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 N. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

15.145-00738-0000

NORTH

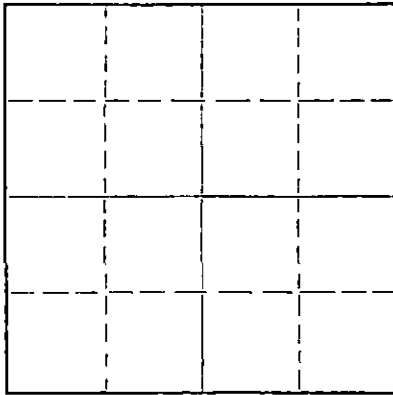

Locate well correctly on above  
Section Plat

Pawnee County. Sec. 27 Twp. 23S Rge. (E) 15 (W)  
Location as "NE/CNW/SW" or footage from lines NE SW NE  
Lease Owner Thunderbird Drilling, Inc.  
Lease Name English Well No. 1  
Office Address 712 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 29 19 58  
Application for plugging filed January 29 19 58  
Application for plugging approved January 29 19 58  
Plugging commenced January 29 19 58  
Plugging completed January 29 19 58  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Frank Broadfoot, St. John, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 4160 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	211'	8 5/8"	224.25'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Gunned pits and circulated heavy mud. Set plug at 180' with 1/3 sack Hulls and 20 sacks cement. Filled hole to 35', set plug with 1/3 sack Hulls and 10 sacks cement. Cap to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Thunderbird Drilling, Inc.  
Address 712 Union Center, Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Charles W. Aikins, Jr., (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) Charles W. Aikins, Jr., Pres.  
712 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 31st day of January, 19 58

My commission expires Sept. 5, 1960

Jenell Schartz Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION

FEB 1 1958  
CONSERVATION DIVISION

## THUNDERBIRD DRILLING, INC.

## WELL LOG

LOCATION: #1 ENGLISH  
NE SW NE Sec. 27,  
Twp. 23.S, Rge. 15.W  
Pawnee County, Kansas

CONTRACTOR: Thunderbird Drilling, Inc.  
712 Union Center

SURFACE CASING: 8 5/8" set at 211' with  
175 sacks of cement, 2%  
gel and 3 sacks Calcium  
Chloride.

OIL STRING: None

ELEVATION: 2009' K. B.  
2006' D. F.  
2004' G. L.

COMMENCED: January 18, 1958


COMPLETED: January 29, 1958

## WELL LOG


0 - 135	Sand
135 - 211	Shale
211 - 410	Red Bed
410 - 490	Sand
490 - 945	Red Bed
945 - 970	Anhydrite
970 - 1810	Shale & Shells
1810 - 1970	Shale & Lime
1970 - 2465	Lime
2465 - 3345	Shale & Lime
3345 - 3555	Lime
3555 - 3640	Shale & Lime
3640 - 3925	Lime
3925 - 4020	Shale & Lime
4020 - 4075	Cherty Lime
4075 - 4137	Sand & Shale
4137 - 4160	Lime
4160	Rotary Total Depth


The undersigned, Charles W. Aikins, Jr., an officer of Thunderbird Drilling, Inc., hereby certifies that the above is a true and correct log of the formations encountered in the drilling of the #1 English as shown in the daily drilling reports.

THUNDERBIRD DRILLING, INC.

  
Charles W. Aikins, Jr., Pres.

Subscribed and sworn to before me  
this 31st day of January, 1958.

  
Jenell Schartz - Notary Public

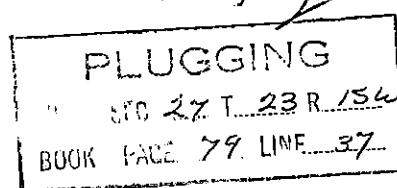

My commission expires:

September 5, 1960

STATE CORPORATION COMMISSION

FEB 1 1958

CONSERVATION  
Wichita 1958