


WELL PLUGGING RECORD 15-145-00809-0000

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Pawnee County, Sec. 30 Twp. 23 Rge. 15 (E) (W)  
Location as "NE/CNW/SW" or footage from lines SWSW SE SW  
Lease Owner Specter Pipe & Supply Company, Inc.  
Lease Name Garvin Well No. 6  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 8-1-54 19  
Application for plugging filed Sept. 14, 1970 19  
Application for plugging approved Sept. 15, 1970 19  
Plugging commenced November, 19, 1970 19  
Plugging completed November, 23, 1970 19  
Reason for abandonment of well or producing formation failure to produce profitably  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

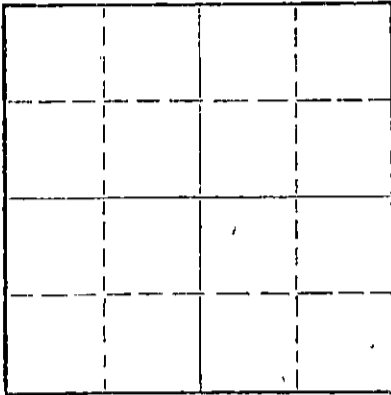

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Kansas City Depth to top 3617 Bottom 3848 Total Depth of Well 3995 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	287 ft.	none
				5 1/2" OD	3995	2990 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged, back with sand to 3600- feet, dumped 5- sacks Cement.  
Pumped, 3- sacks Hulls, 20- sacks Mud, 100- sacks Cement.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 4 - 1970  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Company, No. 457.  
Address Route, 4, Great Bend, Kansas, 67530

STATE OF Kansas, COUNTY OF Russell, ss.  
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas (Address)

Subscribed and Sworn to before me this 3<sup>rd</sup> day of December, 1970



My commission expires March 9, 1974

W. H. Dawson Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
503 East Murdock, Wichita, Kansas

COPY

Company—M. B. ARMER  
Farm—Garvin

No. 6


SEC. 30 T. 23 R. 15W  
SW SE SW

15-145-00804-0000

Total Depth. 3995  
Comm. 7-20-54  
Shot or Treated.  
Contractor. Armer, Inc.  
Issued. 9-25-54

Comp. 8-1-54

County Pawnee  
KANSAS



Elevation. 2051 KB

Production. 285 B0, no water

CASING:

8 5/8 287'  
5 1/2 3995'

Figures Indicate Bottom of Formations.

sand	150
shale	287
shale & sand	625
shale & shells	962
anhydrite	985
shale & red bed	1390
shale, red bed & shells	1720
shale & shells	1845
shale & lime	3623
lime	3875
shale	3932
lime & shale	3974
lime	3995
Total Depth	

TOPS: (RB Meas.)

Heebner	3477
Brown lime	3604
Lansing	3617
Base KC	3848
Viola	3992

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 15 1970  
CONSERVATION DIVISION  
Wichita, Kansas