

15-145-00863-2000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

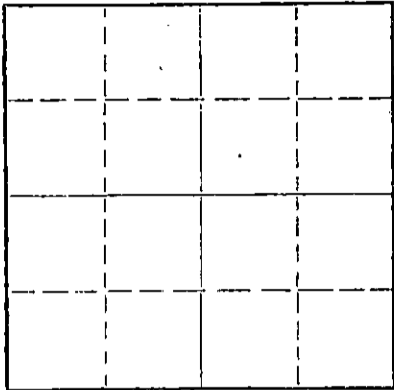

Locate well correctly on above
Section Plat

Pawnee County, Sec. 30 Twp. 23 Rge. 15 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE SE SW
Lease Owner Morton Specter
Lease Name Garvin Well No. 5
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 6-17-54 19
Application for plugging filed Sept. 14, 1970 19
Application for plugging approved Sept. 15, 1970 19
Plugging commenced _____ 19
Plugging completed November 23, 19 70
Reason for abandonment of well or producing formation failure to produce
profitably
If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Kansas City Depth to top 3603 Bottom 3827 ft Total Depth of Well 3991 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	299 ft.	none
				5 1/2" OD	3991	2570 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to 3600- feet, dumped 5- sacks Cement,
Pumped 3- sacks Hulls, 20- sacks Mud,
100- sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
DEC 4 - 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling, Company, No. 457
Address Route, 4. Great Bend, Kansas. 67530

STATE OF Kansas, COUNTY OF Russell, ss.
Morton Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morton Specter
Russell, Kansas (Address)

Subscribed and sworn to before me this 32d day of December, 1970



W. H. Dawson
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


Company- M. B. ARMER
Farm- Garvin No. 5

SEC. 30 T. 23 R. 15W
NE SE SW

15-145-00803-0000

Total Depth. 3991'
Comm. 6-4-54 Comp. 6-17-54
Shot or Treated.
Contractor. M. B. Armer
Issued. 7-31-54

County Pawnee KANSAS



CASING:
8" 299'
5" 3991'

Elevation. 2051' KB.

Production. BHB 2643 & no water

Figures indicate Bottom of Formations.

surface clay & sand	35
sand	100
sand & shells	185
blue shale & shells	299
red bed	445
sand	525
red bed	955
anhydrite	980
shale & shells	1215
shale, shells & salt	1585
shale & shells	1815
lime & shale	3604
lime	3620
lime & shale	3689
lime	3710
lime & shale	3978
shale, chert & granit	3991
Total Depth	

Tops: K.B. Meas.	
Heebner	3465
Toronto	3485
Douglas	3501
Brown Lime	3584
Lansing	3603
Base Kansas City	3827
Conglomerate	3842
Simpson	3969
Pre-Cambrian Granit	3986

RECEIVED
STATE CORPORATION COMMISSION
SEP 15 1970
CONSERVATION DIVISION
Wichita, Kansas