


STARR
DISTRICT CONSERVATION
DIVISION
JAN 28 1950

DISTRICT CONSERVATION AGENT'S REPORT

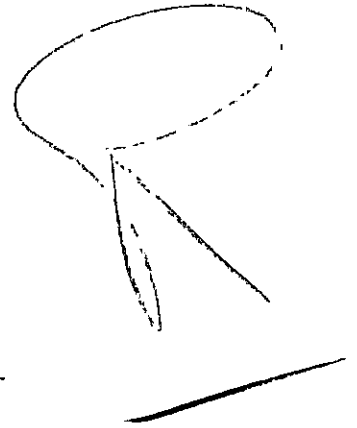

OK

1-28-50

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE-SE-11W

SEC. 1 TWP. 21 RGE. 13W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Starr

Operator Duby Oil Co Address 4720 W. Douglas - Wichita - Kans.

Field _____ County Stafford

Total Depth 2561 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 7/8 - 223 ft - Circulated with cement -
5 1/2 casing set at 349 ft - Plugged back to surface to
357 1/2 ft with cement - Chat down 357 1/2 ft - to 349 ft -
dumped 5 sacks of cement at 349 ft - Shot off & pulled
the 5 1/2 casing - Filled with mud to 223 ft - Set back
bridge & 15 sacks of cement at 223 ft - Mud to 300 ft -
Bridge & 10 sacks of cement at the surface.

E. W. Strong

District Conservation Agent

Date 1-26-50

PLUGGING
FILE SEC 1 T 21 R 13W
BOOK PAGE 136 LINE 29

