

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec. 11 Twp. 21 Rge. 14 (E) W (W)

Location as "NE/CNW/SW" or footage from lines E/2 NE/4 SW/4

Lease Owner Icer Addis

Lease Name Anschutz "B" Well No. 1

Office Address Drawer 8038, Wichita, Kansas 67208

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 6-11 1977

Application for plugging filed 6-11 1977

Application for plugging approved 6-11 1977


Plugging commenced 6-11 1977

Plugging completed 6-11 1977

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 10

Was permission obtained from the Conservation Division or its agents before plugging was commenced? J. H. Metz

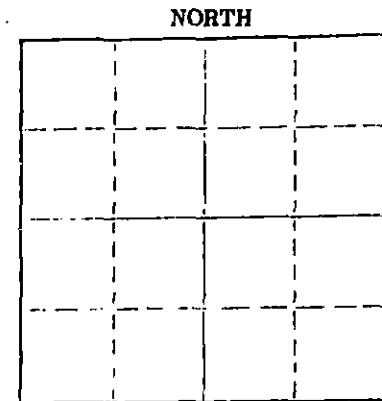

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 3708 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	236'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Plug down @ 12:45 a.m. w/57 sacks common cement. Set 40 sacks plug @ 240', 12 sacks from 40' to surface. 5 sacks in rathole. By Howco.

RECEIVED
STATE CORPORATION COMMISSION

7-21-77 JUL 21 1977

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allen Drilling Company
Address P. O. Box 1389, Great Bend, Kansas
CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS COUNTY OF BARTON ss.
Allen Drilling Company (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) X Earl Allen

P. O. Box 1389, Great Bend, Kansas 67530 (Address)

Subscribed and sworn to before me this 13th day of June 77



Ulanda Nichols Notary Public.

DRILLER'S WELL LOG

DATE COMMENCED: 6-5-77
 DATE COMPLETED: 6-12-77

Icer Addis
 Anschutz #1-B
 E/2 NE/4 SW/4, Sec. 11-21-14W,
 Stafford County, Kansas

ELEVATIONS K.B. 1925'
 G.L. 1920'

FORMATION DATA

0- 817' Sand and Shale
 817- 847' Anhydrite
 847-2874' Lime and Shale
 2847-3228' Lime
 3228-3233' Shale
 3233-3251' Lime
 3251-3270' Lime
 3270-3345' Shale
 3345-3356' Lime and Shale
 3356-3581' Lime
 3581-3601' Lime and Shale
 3601-3631' Chert
 3631-3682' Sand
 3682-3708' Dolomite
 3708' RTD

Anhydrite 817
 Topeka 2874
 Heebner 3228
 Toronto 3251
 Douglas 3270
 Brown Lime 3345
 Lansing 3356
 Base Kansas City 3581
 Viola 3601
 Simpson 3631
 Arbuckle 3682
 RTD 3708

SURFACE PIPE:

Ran 6 Jts. 8 5/8" used casing.
 Set @ 236', w/250 sacks 50/50 Pozmix,
 2% Gel., 3% cc. P.D. @ 11:00 p.m.
 By Howco.

PLUGGING:

Plug down @ 12:45 a.m. w/57 sacks
 common cement. Set 40 sacks plug
 @ 240', 12 sacks from 40' to surface.
 5 sacks in rathole. By Howco.

RECEIVED
 STATE CORPORATION COMMISSION

JUL 21 1977

CONSERVATION DIVISION
 Wichita, Kansas

AFFIDAVIT

STATE OF KANSAS)
 COUNTY OF BARTON) ss.

Earl Allen, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

X Earl Allen

Subscribed and sworn to before me this 13th day of June 1977.

Lavelta M. Murnahan
 (Notary Public)

My commission Expires: 11-25-79

