

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

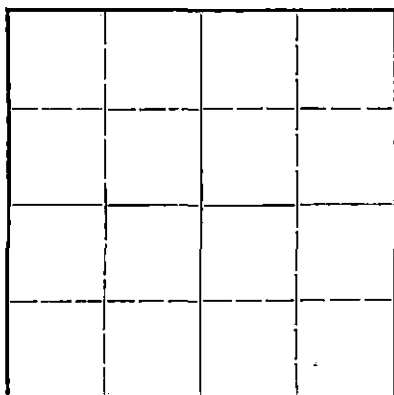

Locate well correctly on above  
Section Flat

Barton County. Sec. 21 Twp. 16. Rge. (E) 12 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE NW NW

Lease Owner Hinkle Oil Company and Franco Central Oil Company

Lease Name Stoskopf Well No. 1

Office Address 919 Union National Bank Bldg., Wichita, Kansas.

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 2-12 19 47

Application for plugging filed 2-12 19 47

Application for plugging approved 2-12 19 47

Plugging commenced 2-12 19 47

Plugging completed 2-12 19 47

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Herb. Kerr

Producing formation Depth to top Bottom Total Depth of Well 3424 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8"	118'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud from 3424 feet to 118 feet.  
Set wood plug at 118 feet  
Cemented with 15 sax of cement  
Filled with mud to 15 feet  
set wood plug at 15 feet  
cemented to 10 sax cement

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Hinkle Oil Company  
Address 919 Union National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

J. B. Hinkle (employer or owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. B. Hinkle

SUBSCRIBED AND SWORN to before me this 15th day of Feb. 19 47

(Address) FEB 17 1947 2-17-47  
Maurice C. Upton  
Notary Public.

My commission expires 1-17-50

PLUGGING  
FILE # 21-16-9124  
BOOK PAGE 98 LINE 20

Casing Record  
118' 8"

Stoskopf No. 1. SE NW NW 21-16-12 Barton Co. Kansas.  
Owners: Hinkle Oil Company and Franco Central  
Contractor: J. B. Hinkle.  
Well Commenced 2-1-47 Well completed 2-12-47  
Elevation 1926

0	118	Surface
118	210	Shale and shells
210	220	Sand
220	379	Grey shale
379	805	Shale
805	835	Sand
835	845	Anhydrite
845	1064	Lime and shale
1064	1420	Shale
1420	1636	Lime and shale
1636	2178	Shale
2178	2283	Shale and shells
2283	2710	Shale
2710	3395	Lime
3395	3397	Sand
3397	3411	Lime
3411	3424	Lime Sand

T.D.

Drill stem test from 3392-3400, recovered 35' mud, no odor, no show.

Tops:

Hebner shale	3013
Lansing	3114
Sand	3390
Arbuckle	3408

State of Kansas )  
County of Sedgwick ) ss


I hereby certify that the above is a true and correct log as compiled from the daily drilling reports kept on said well.

J. B. Hinkle

Subscribed and sworn to before me this 15th day of February, 1947.

Muriel A. Lepton N.P.

My commission expires 1-17-1950



PLUGGING  
FILE NO. 21-16-2124  
BOOK PAGE 48 LINE 20