

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-083-21,311-0000

LEASE NAME Brady

WELL NUMBER 1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

1980 Ft. from S Section Line

660 Ft. from E Section Line

SEC. 7 TWP. 21SRGE. 23 (E) or (W)

COUNTY Hodgeman

LEASE OPERATOR Black Petroleum Company

ADDRESS P. O. Box 12922, Wichita, KS 67277

PHONE# (316) 942-2741 OPERATORS LICENSE NO. 5068

Date Well Completed 9/27/88

Character of Well D&A

Plugging Commenced 9/27/88

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 9/27/88

The plugging proposal was approved on 9-27-88 (date)

by Glen Barlow (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 4485'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	From	To	Size	Put in	Pulled out
			8-5/8"	297'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.

Mud laden fluid 4485'-1520' 10 sks cement @ 40'
 50 sks cement @ 1520' 15 sks cement in rathole
 50 sks cement @ 650' 10 sks cement in mousehole
 40 sks cement @ 350'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

STATE OF Kansas COUNTY OF Russell, ss.

Kelly P. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) [Signature]

(Address) Kelly P. Branum
P. O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 29th day of September, 1988

Glenda R. Tiffin
Glenda R. Tiffin, Notary Public

My Commission Expires: February 6, 1992



EMPHASIS OIL OPERATIONS

P. O. BOX 506
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Black Petroleum Company
P. O. Box 12922
Wichita, Kansas 67277

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Brady WELL #1

LOCATION: C NE SE
Section 7-21S-23W
Hodgeman County, Kansas

ROTARY TOTAL DEPTH: 4485'

ELEVATION: 2293' K.B.

COMMENCED: 9/17/88

COMPLETED: 9/27/88

CASING: 8-5/8" @ 297' w/175 sks cement

STATUS: Dry Hole

RECEIVED
STATE CORPORATION COMMISSION
SEP 30 1988

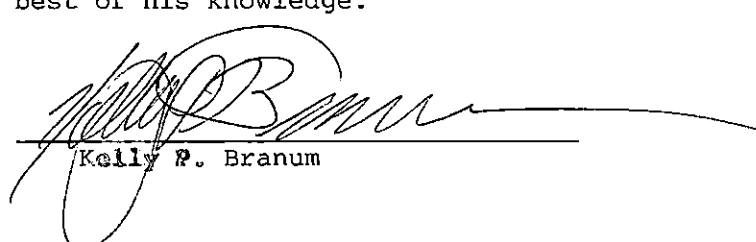
DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Post Rock	73'	Anhydrite	1533'
Shale, Sand & Clay	142'	Red Bed	2460'
Shale	435'	Shale	3800'
Dakota Sand	503'	Lime & Shale	3995'
Red Bed	969'	Lime	4485'
Cedar Hills Sand	1162'	R.T.D.	4485'
Red Bed	1505'		


STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.


Kelly P. Branum

Subscribed and sworn to before me on September 29, 1988.

My commission expires: February 6, 1992.


Glenda R. Tiffin, Notary Public

