

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

15-145-01328-0000

Pawnee County, Sec. 30 Twp. 23 Rge. (E) 15(W)

Location as "NE/CNW&SW&W" or footage from lines NW-SW-SE

Lease Owner Quality Supply Co.

Lease Name Hall "A" Well No. 22

Office Address 202 Petroleum Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 11-3-60 19

Plugging completed 11-5-60 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

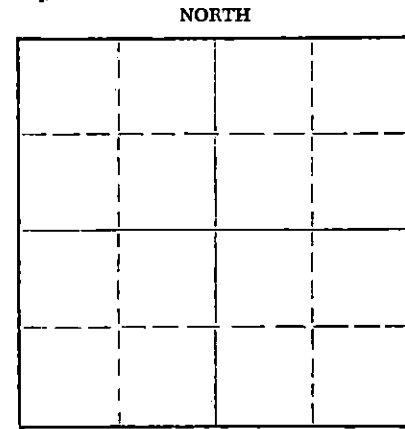

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot

Producing formation Depth to top Bottom Total Depth of Well 3835 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	285	None
				5 1/2"	3834'	3029'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole to 3815-dumped 5 sks cement-mudded hole to 300' set 10' rock bridge-dumped 20 sks cement-mudded to 40'-set 10' rock bridge-dumped 10 sks cement.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 8 1960

CONSERVATION DIVISION  
WICHITA, KANSAS

12-8-60

Name of Plugging Contractor R & D Casing Pulling Co. License #230

Address Box 154, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Jack Shear (conservator or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack Shear, President

202 Pet. Bldg. (Address)

SUBSCRIBED AND SWORN TO before me this 29 day of November, 1960

My commission expires June 1, 1963

Lee Mankin Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
599 East Murdock,  
Wichita, Kansas

COPY


15-145-01328-0000

Company- M. E. ARMER  
Farm- Hall "A" No. 2

SEC. 30 T. 23 R. 15W  
NW SW SE

Total Depth 3835  
Comm. 6-18-54  
Shot or Trealed  
Contractor, M. B. Armer  
Issued. 9-25-54

County, Pawnee  
LANSE



CASING:  
8 5/8 285'  
5 1/2 3834'

Elevation 2044 KB

Production 81 TO, 3% water

Figures Indicate Bottom of Formations.

surface clay & sand	20
sand	100
sand & shells	145
shale & sand streaks	190
shale & shells	285
red bed & shale	460
sand	500
sand & shale	635
red bed	954
anhydrite	978
shale & shells	1595
shale & lime	1810
lime	1960
shale & lime	3450
lime	3503
shale & lime	3612
lime	3665
shale & lime	3723
lime	3775
shale & lime	3785
lime	3835
Total Depth	

TOPS: (KB Meas.)	
Heebner	3481
Brown lime	3612
Lansing	3621

RECEIVED  
STATE COMMISSION  
DEC 8 1960  
CON DIVISION  
Wichita, Kansas

Sand to 3815 @ 55%