


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD



Stafford County, Sec. 16 Twp. 21 Rge. (E) 12 (W)
Location as "NE/CNW/SW" or footage from lines SE NW SW
Lease Owner Circle Oil Co., Inc.
Lease Name Williams Well No. 2
Office Address 500 Bitting Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 19__
Application for plugging filed 19__
Application for plugging approved 19__
Plugging commenced September 16, 1965 19__
Plugging completed September 16, 1965 19__
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Herman Justus)

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3665 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|------|--------|---------|------------|
| | Surface | 0 | 264' | 8-5/8" | 9/10/65 | |
| | Casing | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy Mud from Total Depth to 250 feet;
Hull and wood plug and 25 sacks cement
through drill pipe; heavy mud to 40 feet;
Wood plug, 10 sacks cement and 1/4 sack hulls
to surface; 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
SEP 28 1965
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sage Drilling Co., Inc.
Address 500 Bitting Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Lawrence F. Gray (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lawrence F. Gray
500 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of September, 1965

Louise K. Whitted
Louise K. Whitted - Notary Public.

My commission expires November 26, 1966

DRILLERS LOGWILLIAMS NO. 2

| | | | |
|---|-------------|--------------------|---|
| CASING RECORD: | COMPANY: | Circle Oil Co. | DESCRIPTION: |
| 264' of 8-5/8" Surface w/255 sax cement | CONTRACTOR: | Sage Drilling Co. | SE NW SW Sec. 16-21S-12W Stafford Co., Kansas |
| | CEMMENCED: | September 10, 1965 | |
| TOTAL DEPTH: 3665' | COMPLETED: | September 16, 1965 | |

| <u>FORMATION</u> | <u>FROM</u> | <u>TO</u> | <u>REMARKS</u> |
|--------------------|-------------|-----------|----------------|
| Sand | 0 | 265 | |
| Red Bed | 265 | 550 | |
| Shale | 550 | 645 | |
| Anhydrite | 645 | 670 | |
| Shale & Shells | 670 | 1510 | |
| Sandy Lime & Shale | 1510 | 1570 | |
| Lime & Shale | 1570 | 2465 | |
| Shale & Lime | 2465 | 2740 | |
| Lime & Shale | 2740 | 3141 | |
| Shale | 3141 | 3239 | |
| Lime & Shale | 3239 | 3305 | |
| Lime | 3305 | 3420 | |
| Lime & Shale | 3420 | 3565 | |
| Chert | 3565 | 3665 | |


RECEIVED
STATE CORPORATION COMMISSION
SEP 28 1965
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING COMPANY, INC.


Lawrence F. Gray

Subscribed and sworn to before me this 22nd day of September, 1965.

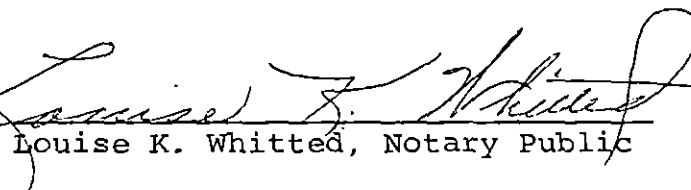
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1966.