


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

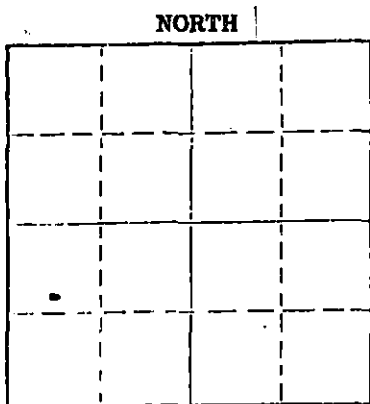

Locate well correctly on above Section Plat

Stafford County, Sec. 11 Twp. 21 Rge. (E) 11 (W)
 Location as "NE/CNW/SW" or footage from lines S/2 NW SW
 Lease Owner F. G. Holl
 Lease Name Schafer Well No. 5
 Office Address 6427 E. Kellogg, Wichita, Kansas 67207
 Character of Well (completed as Oil, Gas or Dry Hole) oil
 Date well completed September 27 19 66
 Application for plugging filed April 17 19 75
 Application for plugging approved 19
 Plugging commenced May 10 19 75
 Plugging completed May 21 19 75
 Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3403 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			257'	8 5/8"	257'	none
			3402'	4 1/2"	3402'	2694.62

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 3000' and dumped 4 sacks of cement.

Allied Cementing Company plugged well pumping in 1 sack of hulls, 10 sacks of gel and 100 sacks of cement.

MAY 28 1975

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)
 Address Box 128, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON CO.
Evelyn Roth (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas (Address)

Subscribed and sworn to before me this 27th day of May 19 75

My commission expires _____

JENNY KASSELMAN
 NOTARY PUBLIC
 BARTON COUNTY, KANSAS
 MY COMM. EXP. JULY 16, 1978

Jenny Kasselmann
 Notary Public

W E L L L O G

F. G. Holl's SCHAFFER #5
 C South Line of NW SW
 Section 11-21S-11W
 Stafford County, Kansas

Figures indicate bottom of formation:

ELEVATION: 1753' KB

PIPE RECORD:

8 5/8" set @ 257'
 with 225 sacks cement.

4 1/2" set @ 3402'
 with 75 sacks cement.

ROTARY COMMENCED: 9-20-66

ROTARY COMPLETED: 9-27-66

0 to	10	cellar
	100	sand & shale
	190	sand & clay
	350	red rock
	470	shale
	1325	shale & shells
	2130	lime & shale
	2640	shale & Shells
	2925	lime & shale
	3045	shale & lime
	3392	lime & shale
	3403	rotary total depth

TOPS:

Heebner	2916
Brown Lime	3045
Lansing	3070
Base Kansas City	3302
Conglomerate Shale	3323
Conglomerate Chert	3326
Base Chert	3351
Arbuckle	3386

RECEIVED
 STATE CORPORATION COMMISSION

APR 18 1975


CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

I, Dean Wells, Partner of Isern Drilling Company, contractor for the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matter herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.


 Dean Wells, Partner

Subscribed and sworn to before me on this 27th day of September, 1966.


 George A. Meyer, Notary Public

My commission expires February 10, 1967.