


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

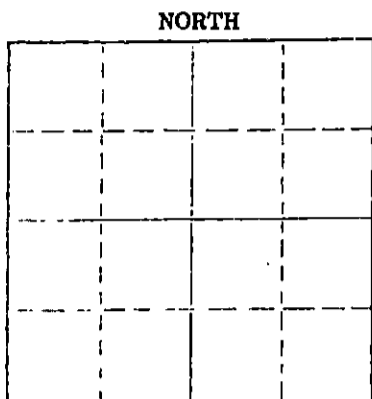

Locate well correctly on above Section Plat

Stafford County, Sec. 32 Twp. 21S Rge. 13W (XX) (XX)
 Location as "NE/CNW/SW" or footage from lines NW SW NW
 Lease Owner Mr. J.C. Musgrove
 Lease Name Moses Well No. 1
 Office Address P.O. Box 8038 Wichita, Kansas 67208
 Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
 Date well completed August 10, 1975 19
 Application for plugging filed verbal application 19
 Application for plugging approved verbal approval 19
 Plugging commenced August 10, 19 75
 Plugging completed August 10, 19 75
 Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G.R. Biberstein
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,650 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	260'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 3,650 feet (rotary total depth) to 230 feet. Set plug at 230 feet and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 230 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 15 sacks of cement, 2 sacks cement in rathole.
Plugging operations accomplished utilizing Sun Oil Well cementing pump truck through 4 1/2 inch drill pipe.

Name of Plugging Contractor H-30, Inc. (If additional description is necessary, use BACK of this sheet)
 Address 200 North Main Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick
Dean Britting - Agent (Employee of owner) or (Operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main Wichita, Kansas 67202
 (Address)

Subscribed and Sworn to before me this 18th day of August, 1975



My commission expires June 30, 1978 Elsie Willison -- Notary Public.

RECEIVED
 STATE CORPORATION COMMISSION

AUG 20 1975

CONSERVATION DIVISION
 Wichita, Kansas

15.185.20577.0000

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Mr. J.C. Musgrove

SEC. 32 T. 21S R. 13W
 LOC. NW SW NW

FARM Moses

NO. 1

TOTAL DEPTH 3,650'

COUNTY Stafford
 KANSAS


COMM. August 1, 1975

COMP. August 10, 1975

SHOT OR TREATED

CONTRACTOR H-30, Inc.

ISSUED



CASING

20
 15
 12
 13

10
 8
 6
 5

5/8" 260' cemented w/225 sacks cement

ELEVATION 1,913 KB

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	10'
Shale and Sand	797'
Anhydrite	812'
Sand and Shale	1,090'
Shale and Shells	1,195'
Shale	1,695'
Shale and Lime	2,060'
Shells and Shale	2,155'
Shale and Lime	3,190'
Lime	3,280'
Shale and Lime	3,397'
Lime	3,650'
Rotary Total Depth	3,650'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, Inc.

Dean Britting

 Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 18th day of August, 1975.

Elsie Willison

 Elsie Willison -- Notary Public

My Commission Expires:
 June 30, 1978

RECEIVED
 STATE CORPORATION COMMISSION

AUG 20 1975

CONSERVATION DIVISION
 Wichita, Kansas

