


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Stafford County, Sec. 32 Twp. 21 Rge. (E) 13(W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
Lease Owner Simon Lebow
Lease Name Moon Well No. 1
Office Address 608 Oil Capital Bldg. Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 28, 1950 19
Application for plugging filed April 27, 1950 19 50
Application for plugging approved April 27, 1950 19 50
Plugging commenced April 27 19 50
Plugging completed April 27 19 50
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 33893 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 3560, set first plug at 330', placed 15 sacks cement through drill pipe filled hole with mud to 30' of ground level, set second plug, dumped ten sacks cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Raymond & Lebow Drilling Company Inc.
Address 202 Bissantz Bldg. Wichita, Kansas


STATE OF Kansas COUNTY OF Sedgwick
Francis M. Raymond (employee or owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Francis M. Raymond*
202 Bissantz Bldg. (Address)

SUBSCRIBED AND SWORN to before me this first day of May 1950

Gene W. Jett
Notary Public.

My commission expires May 18, 1952

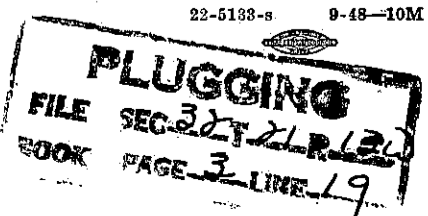

Simon Lebow
608 Oil Capital Bldf.
Tulsa, Oklahoma

S/2 SW/4-32-21-13W
County, Stafford
State, Kansas

Moon No.1

Production D & A

Comm. 4-16-50
Comp. 4-28-50

Total Depth 3893

Casg. 8 5/8" Cem. 340'

Cellar	0	5	
Sand	5	210	
Shale & Sand	210	327	
Red Bed	327	490	Total Surface Depth 335'
Sand & Red Bed	490	760	
Shale & Shells	760	795	
Anhydrite	795	890	
Sand & Shale	890	1050	
Shale & Shells	1050	1635	
Salt	1635	1655	
Shale & Lime	1655	1755	
Lime	1755	1930	
Lime & Shale	1930	3706	
Cherty Lime	3706	3740	
Shal e	3740	3752	
Shale & Lime	3752	3790	
Lime	3790	3793	
Arbuckle	3793	3893	

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

RAYMOND & LEBOW DRILLING COMPANY INC.

BY *Francis M. Raymond*

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a notary public, in for said County and State this 1st. day of May, 1950.

Gene J. [Signature]
Notary Public

My Commission Expires: My commission expires May 18, 1952

MAY 2 - 1950

PLUGGING
FILE SEC-52421 R/32
BOOK PAGE 3 LINE 19