

To: 1 010078
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING SECTION
200 COLORADO DERBY BUILDING
WICHITA, KANSAS 67202

API NUMBER 15- Comp. 1-17-53 15-145-01391-0001

SW NW NE, SEC. 32, T 23 S, R 15 W/E
4290 feet from S section line
2310 feet from E section line

TECHNICIAN'S PLUGGING REPORT
Operator License # 5447
Operator: Cities Service Oil & Gas Corp.
Name & Address: 3545 NW 58th Street
Oklahoma City, OK 73112

Lease Name Benson Unit Well # 302W
County Pawnee 125.84
Well Total Depth 3872 feet
Conductor Pipe: Size _____ feet
Surface Casing: Size 8 5/8 feet 367

Abandoned Oil Well _____ Gas Well _____ Input Well _____ SWD Well D&A _____

Other well as hereinafter indicated _____

Plugging Contractor Kelso Casing Pulling License Number 6050
Address: P. O. Box 347, Chase, KS 67524

Company to plug at: Hour: 2:30 pm Day: 21 Month: January Year: 19 86

Plugging proposal received from Neil Peddicord

(company name) Kelso (phone) 316-938-2457

were: 5 1/2" at 3872' PBD 3676' Perfs at 3609-3654'
1st plug sand back to 3560' and spot 5 sx cement on top of sand through bailer
2nd plug pump 10 sx gel and 200 sx cement.

Plugging Proposal Received by Richard W. Lacey
(TECHNICIAN)

Plugging Operations attended by Agent?: All Part _____ None _____

Operations Completed: Hour: 3:05 pm Day: 21 Month: January Year: 19 86

ACTUAL PLUGGING REPORT 1st plug sanded back to 3530' and dumped 5 sx cement on top of sand
through bailer, 2nd plug pumped 10 sx gel and 200 sx cement.

RECEIVED
STATE CORPORATION COMMISSION

1-27-86 JAN 27 1986

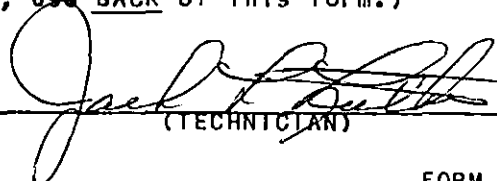
Maximum pressure 400 psi and shut in 150 psi CONSERVATION DIVISION
Wichita, Kansas

Remarks: Recovered 450' 5 1/2" casing. Used 60/40 Pozmix 6% gel by Allied.
(If additional description is necessary, use BACK of this form.)

INVOICED

(If necessary) observe this plugging.

DATE FEB 5 1986

Signed  (TECHNICIAN)

INV. NO. 12333