


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County, Sec. 32 Twp. 21S Rge. 11 (E) (W) X

NORTH

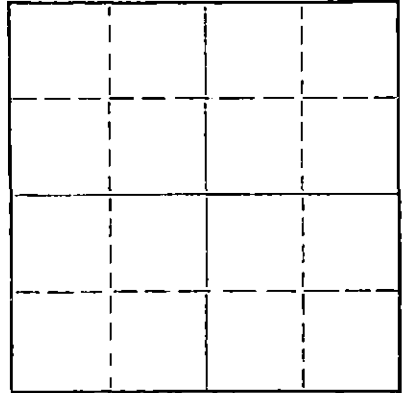

Locate well correctly on above  
Section Flat

Location as "NE/CNW/SW" or footage from lines Center of SE NW SE  
Lease Owner Rains & Williamson Oil Company  
Lease Name Wolf Well No. 2  
Office Address 1125 Wichita Plaza Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 3-8-66 19\_\_\_\_  
Application for plugging approved 3-10-66 19\_\_\_\_  
Plugging commenced 3-22-66 19\_\_\_\_  
Plugging completed 3-25-66 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_  
Dry

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3515 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	256	None
				5 1/2	None	2457

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved in. Cleaned out cellar. Sanded to 3400'. Dumped 5 sacks of cement. Working pipe.  
Working pipe. Shot pipe at 2550' & 2450'. Pulling pipe.  
Pulling pipe.  
Squeezed well with 10 sacks of mud and 80 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 30 1966

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 29 day of March, 1966

My commission expires May 27, 1969

Notary Public.

## ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co. Contractor: Rains & Williamson  
 NO. 2 WOLF Oil Co.  
 C SE NW SE Sec. 32-21S-11W Commenced: 6-9-64  
 Stafford County, Kansas Completed: 6-19-64  
 Remarks: Set 8-5/8" surface casing  
 at 256' with 160 sacks  
 GL3 cement.  
 Set 5-1/2" casing 6' off  
 bottom with 125 sacks  
 cement.

## FORMATIONS:

Surface Soil & Hard Sand	115'
Red Bed & Shale	474'
Lime (Anhydrite)	492'
Shale & Shells	970'
Shale & Lime	1535'
Lime	1975'
Lime & Shale	2440'
Lime	3410'
Chert	3435'
Lime	3445'
Sand	3466'
Lime	3497'
Arbuckle	3515'
Rotary Total Depth	3515'

RECEIVED  
 STATE CORPORATION COMMISSION

MAR 9 1966

INSERVATION DIVISION  
 STATE OF KANSAS

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains, Partner

Wilson Rains

Subscribed and sworn to before me, a Notary Public in and for the State of Kansas, County of Sedgwick, this 22nd day of June, 1964.

My Commission Expires:  
 January 8, 1968

Shirley Keck  
 Shirley Keck, Notary Public