


Give All Information Completely  
Make Required Affidavit  
Mail or Delivery Report to:  
Conservation Division  
State Corporation Commission  
242 North Market, Insurance Bldg.  
Wichita, Kansas

*Recd-17-59*

15.185.00343.0000

WELL PLUGGING RECORD

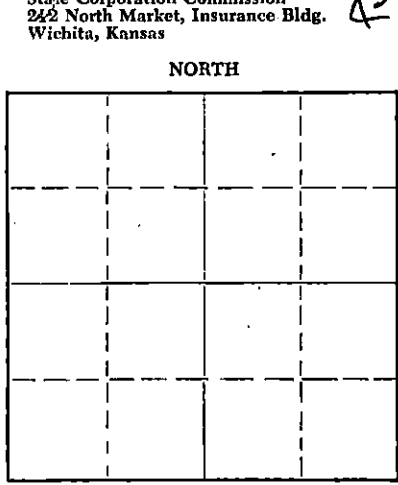

Locate well correctly on above Section Plat

Stafford County, Sec. 32 Twp. 21 Rge. 11W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NW NE  
Lease Owner Tomlinson-Kathol, Inc.  
Lease Name Best Hunt Club Well No. 1  
Office Address 414 Union Center  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9/12/ 19 59  
Application for plugging filed 9/12/ 19 59  
Application for plugging approved 9/12/ 19 59  
Plugging commenced 9/12/ 19 59  
Plugging completed 9/12/ 19 59  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Lakampe  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	208.10	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole filled with heavy mud  
1 plug @ 200' w/20 sks cement  
1 plug @ 35' w/10 sks cement

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Tomlinson-Kathol, Inc.  
Address 414 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Gerald J. Kathol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gerald J. Kathol  
414 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of September, 19 59

My commission expires Jan. 19, 1961  
Catherine L. Lamm Notary Public.

PLUGGING

File Sec. 32 T. 21 R. 11W  
Book Page 3 Line 40

DRILLERS LOG  
 TOMLINSON-KATHOL, INC.  
 # 1 BEST HUNT CLUB  
 NW NW NE, SEC. 32-21-11W  
 STAFFORD COUNTY, KANSAS

Contractor - Tomlinson-Kathol, Inc.

Commenced: 9/4/59  
 Completed: 9/12/59  
 Elevation: 1748 RB

<u>From</u>	<u>To.</u>	<u>Description</u>	<u>Remarks</u>
0	50	Sand	
50	135	Clay	
135	188	Red Bed	
188	205	Lime Shell	208' 8-5/8" w/180 Sks Cement
205	1285	Shale	
1285	1625	Shale & Lime	
1625	1790	Lime & Sand	
1790	1995	Lime & Shale	
1995	2438	Shale	
2438	3178	Shale & Lime	
3178	3225	Lime	
3225	3265	Lime & Shale	
3265	3325	Lime	
3325	3394	Lime	
3394	3450	Lime & Shale	
3450	3486	Shale & Chert	Heebner 2986
3486	3550	Conglomerate	Toronto 3005
3550		Rotary Total Depth	Brown Lime 3122
			Lansing 3142
			Conglomerate 3457

I certify to the best of my knowledge and belief, the above represents a true and accurate Driller's Log record of the captioned well.

  
 Gerald J. Kathol

State of Kansas )  
 )  
 County of Sedgwick )

Subscribed and sworn to before me this 16th day of Sept., 1959

  
 Notary Public

My Commission Expires Jan. 19, 1961

**PLUGGING**

File Sec. 32 T 21 R 11W  
 Book Page 3 Line 40

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 SEP 17 1959  
 CONSERVATION DIVISION