

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
806 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH

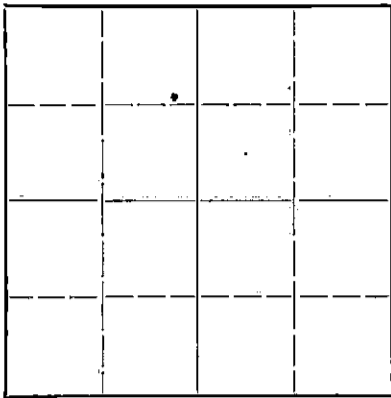

Locate well correctly on above
Section Plat

Stafford County. Sec. 34 Twp. 21 Rge. (E) 11 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. C SW SW NW
Lease Owner. ~~East Lake Hunting Club~~ Hinkle Oil Company, et al.
Lease Name. East Lake Hunting Club Well No. 1
Office Address. 914 Union National Bank Bldg., Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole). Dry hole
Date well completed. 1-31-50 19.
Application for plugging filed. 1-31-50 19.
Application for plugging approved. 1-31-50 19.
Plugging commenced. 1-31-50 19.
Plugging completed. 1-31-50 19.
Reason for abandonment of well or producing formation.

If a producing well is abandoned, date of last production. 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. C. D. Stough.
Producing formation. Depth to top. Bottom. Total Depth of Well. Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	143'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 138'
Set plug at 138'
Cemented with 15 sacks cement
Mud to 30 feet.
Set plug at 30'
Cemented with 10 sacks cement.

FEB 10 1950 2-10-50
COMMISSIONER
KANSAS

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Hinkle Oil Company,
Address. 914 Union National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
J. B. Hinkle (owner) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. B. Hinkle
914 Union National Bank Bldg., Wichita, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of February, 19 50

Muriel A. Jefferson
Notary Public.

My commission expires Jan. 17, 1954



East Lake Hunting Club No. 1.
 C SW/4 SW/4 NW/4 34-21-11, Stafford, ^{Co}Kansas.
 Casing record. Owners: Hinkle Oil Company, et al.
 8 5/8" 143' Contractor, J. B. Hinkle.
 Commenced 1-18-50 Completed 1-31-50
 Elevation 1742

0	130	sand and clay
130	139	red rock
139	180	red rock and shells
180	480	shale and shells
480	1035	shale and lime
1035	1415	shale and shells
1415	1490	lime and shale
1490	1735	lime
1735	1890	lime and shale
1890	1990	lime
1990	2835	lime and shale
2835	3385	lime
3385	3388	chert and lime
3388	3460	lime
3460	3550	lime and chert
T.D.		

Tops@-

K. C.	3121	3121
Viola		3376
Simp.		3398
Arb.		3348

State of Kansas.)
 County of Sedgwick,) sss

FEB 13 1950

I hereby certify that the above is a true and correct log as compiled from the daily drilling reports kept on said well.

And further affiant saith not.

J. B. Hinkle

Subscribed and sworn to before me this 6th day of February, 1950.

Muriel A. Upton
 N.P.

My commission expires 1-17-54

PLUGGING
 CASE NO. 34-T-21R-11a
 DATE PASSED 1/31/50