

STATE OF KANSAS  
STATE CORPORATION COMMISSION

\*Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 22 Twp. 21 Rge. 11 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SW NW

Lease Owner Icer Addis

Lease Name Maggers Well No. 1

Office Address Russell, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 11/27 19 54

Application for plugging filed 11/26 verbally 19 54

Application for plugging approved 11/26 verbally 19 54


Plugging commenced 11/27 19 54

Plugging completed 11/27 19 54

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

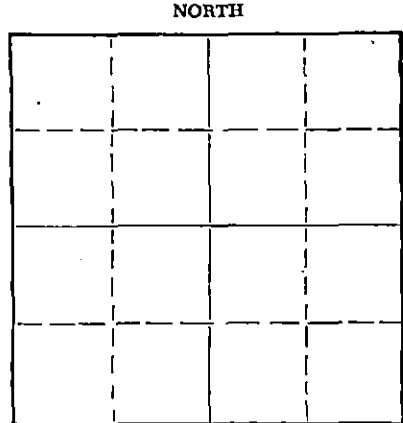

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 3436 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	402'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud. Pushed bottom plug to 250. 1/4 sack hulls & 20 of cement through drill pipe. Filled hole to 35'. Pushed #2 plug to 35'. 1/4 sack of hulls & 10 sacks of cement. Welded plate on top of 8 5/8 surface casing.

12-3-54

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bennett & Roberts Drilling Co.  
Address Russell, Ks.


STATE OF KANSAS, COUNTY OF RUSSELL, ss. Harold Wurst (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. BENNETT & ROBERTS DRLG. CO.

(Signature) Harold Wurst  
Russell, Ks.  
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of December, 19 54

My commission expires 6/17/58

Notary Public



Icear Addis  
Bennett & Roberts Drilling Co. -- Contractor  
Magers #1

SE SW NW Stafford County, Ks.  
22-21-11

R.T.D. 3436

Comm: 11/18/54  
Comp: 11/28/54

Casing  
8 5/8" Set @ 402'

Cement  
275 sx

Formation:	Depth:
Surface Soil	5'
Sand & Gravel	90
Shale	150
Red Bed	500
Shale & Red Bed	650
Shale & Shells	845
Anhydrite	880
Shale	1035
Steel line measurement	
correction	1001
Shale & Salt	1150
Shale	1250
Shale & Shells	1400
Lime & Shale	1485
Shale & Shells	1556
Shale & Lime	1615
Lime	1785
Lime & Shale	2680
Lime & Shale Streaks	2729
Lime & Shale	2904
Lime	3038
Lime & Shale	3099
Lime	3392
Conglomerate	3436

STATE OF KANSAS  
COUNTY OF RUSSELL

I hereby certify that the above information is correct to the best  
of my knowledge.

BENNETT & ROBERTS DRLG. CO.

By *Gene Lake*

Subscribed and sworn to before me this 1st day of December, 1954.

*Clara Hummel*

My Commission Expires 6/17/58

