

WELL PLUGGING RECORD

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Stafford County. Sec. 27 Twp. 21 S. Rge. 11 (E) 11 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. C SE 1/4 SE 1/4 SW 1/4  
Lease Owner: Hinkle Oil Company, et al.  
Lease Name: White Well No. 1  
Office Address: 914 Union National Bank Bldg., Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole): Dry hole  
Date well completed: 9-23-48  
Application for plugging filed: 9-23-48  
Application for plugging approved: 9-23-48  
Plugging commenced: 9-24-48  
Plugging completed: 9-25-48  
Reason for abandonment of well or producing formation:

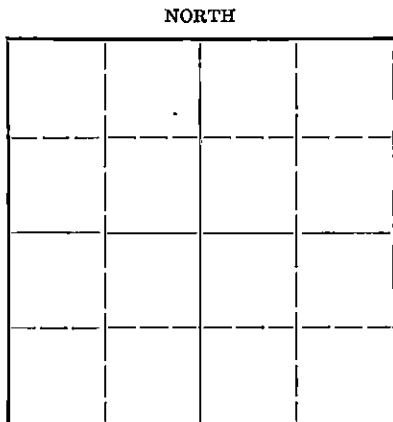

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production: 19...  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: C. D. Stough.  
Producing formation: Depth to top: Bottom: Total Depth of Well: Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	210'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from...feet to...feet for each plug set.

Set plug at bottom filled with mud to to 210'  
Set plug at 210'  
cemented with 15 sacks cement.  
Set plug at 30'  
Cemented with 10 sacks cement to surface.

9-29-48

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Hinkle Oil Company  
Address: 914 Union National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgewick, ss.


J. B. Hinkle (employee of owner) or (owner & operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. B. Hinkle  
914 Union National Bank Bldg., Wichita, Kansas.  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of September, 1948.

Muriel A. Upton  
Notary Public.

My commission expires Jan. 17, 1950



White No. 1. C SE/4 SE/4 SW/4 27-219-11W

Stafford County, Kansas.

Casing record  
210' 8 5/8"

Hinkle Oil Company et. al.

Contractor. J. D. Hinkle.

Commenced 9-12-48

Completed 9-24-48

Elevation 1750

0	135	surface
195	455	red bed
455	490	Anhydrite
490	600	sand and shale
600	1245	shale and shells
1245	1380	soft lime shells
1380	1685	lime
1685	1795	lime and shale
1795	1900	lime
1900	2135	lime and shale
2135	2165	lime
2165	2355	shale and shells
2355	2580	lime and shale
2580	2670	shale and lime shells
2670	3020	lime
3020	3080	lime and shale
3080	3431	lime
3431	3445	sand
3445	3490	shale
3490	3533	shale and lime

Topo-	
K. C.	3121
Cong.	3392-98
Viola	3398
Simpson	3431-45
Artuckle	3480

State of Kansas )  
                          ) so  
County of Sedgewick )

I hereby state that the above is a true and correct log as compiled from the daily drilling reports kept on said well. Further affiant sayeth not.

J. B. Hinkle

Subscribed to and sworn to before me this 27th day of August, 1948.

Murphy A. Upton  
N.P.

My commission expires 1-17-50.

27 21 11W  
L 15 17