


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County. Sec. 26 Twp. 21S Rge. 11 (E) W (W)
Location as "NE/CNW/SE" or footage from lines SE/SE/SE
Lease Owner Frank J. Black SWNE SE
Lease Name Government "B" Well No. 1
Office Address McPherson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 10-18-62 19
Application for plugging filed 10-31-64 19
Application for plugging approved 11-2-64 19
Plugging commenced 12-9-64 19
Plugging completed 12-14-64 19
Reason for abandonment of well or producing formation Depleted.

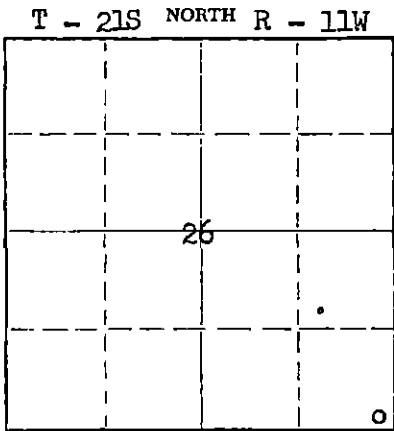

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Depth to top Bottom Total Depth of Well 3776 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	460'	None
				5-1/2"	3469'	2797'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to plug back @ 3200', sanded hole to 3150' and dumped 5 sacks of cement @ 3150' with dump bailer. Pulled 5 1/2" casing. Mudded hole to 300', set rock bridge to 290' and dumped 25 sacks of cement @ 290'. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 4 1965

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY License #436
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of December, 1964

My commission expires May 20, 1968 Notary Public.