


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-145-20(39-0000)

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Pawnee County. Sec. 22 Twp. 23S Rge. 16 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C SW/4 SW/4
Lease Owner Robert F. White
Lease Name Cauble Gas Unit Well No. #1
Office Address 714 Union Center ; Wichita, Kans. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed January 25 19 70
Application for plugging filed July 10 19 72
Application for plugging approved July 19 72
Plugging commenced July 17 19 72
Plugging completed August 1 19 72
Reason for abandonment of well or producing formation Watered out by salt water encroachment.
If a producing well is abandoned, date of last production March 30 19 72
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Wassey
Producing formation Arbuckle Depth to top 4070 Bottom 4080 Total Depth of Well 4080 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface csg.	0	251'	8 5/8"	251'	None
	Prod. String	0	4080'	5 1/2"	4080'	2611'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

July 17, 1972 Plugged off bottom. Dump sand to 4000'. Mixed and dumped 5 sx of cement.
August 1, 1972 Plugged off top. Allied Cementing Co., mixed and pumped down 8 5/8" surface casing, 3 sx of hulls, 20 sx of gel and 100 sx + 6% gel cement.

RECEIVED
STATE CORPORATION COMMISSION
AUG 10 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor RUSS CASING PULLING, INC.
Address P. O. Box 1082 ; Great Bend, Ks. 67530

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Robert F. White (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
714 Union Center, Wichita, Kansas 67202
(Address)

9th day of August, 19 72



commission expires August 6, 1975

Imogene Warren
Imogene Warren Notary Public.

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 11 1972
 CONSERVATION DIVISION
 Wichita, Kansas

ROTARY DRILLERS' LOG

15-145-20139-0000

OPERATOR: Robert F. White DRILLING COMMENCED: Jan. 5, 1970
 714 Union Center
 Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: Jan. 14, 1970
 505 Union Center
 Wichita, Kansas


CASING RECORD: 8 5/8" surface casing set LOCATION: Cauble #1
 @251', with 200 sacks of C SW/4 SW/4 Sec. 22-23S-16W
 cement; 5 1/2" casing set Pawnee County, Kansas
 @4079 1/2', with 125 sacks
 of cement.

0	-	93	Sand
93	-	253	Red bed & shale
253	-	413	Shale
413	-	505	Red bed & shale
505	-	550	Sand
550	-	1016	Red bed & shale
1016	-	1037	Anhydrite
1037	-	1734	Shale & shells
1734	-	3240	Lime & shale
3240	-	3514	Lime
3514	-	3520	Shale
3520	-	3680	Lime & shale
3680	-	3910	Lime
3910	-	3922	Lime & shale
3922	-	3980	Lime
3980	-	4006	Lime & shale
4006	-	4035	Conglomerate
4035	-	4044	Lime & shale
4044	-	4065	Lime
4065	-	4070	Simpson sand & shale
4070	-	4080	Lime
4080			Total Depth

I hereby certify the foregoing statements to be true and correct, to the best of my knowledge.

GRAVES DRILLING COMPANY, INC.

By E. Allen Osborne, Secretary

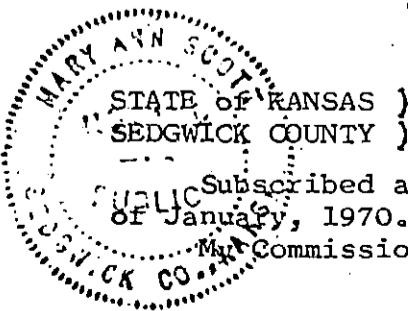

Subscribed and sworn to before me, a Notary Public, this 22nd day of January, 1970.

My Commission Expires: July 28, 1970

Mary Ann Scott
 Mary Ann Scott, Notary Public