


15-145-00428-001

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pawnee County. Sec. 25 Twp. 23S Rge. 16W (E) (W)
Location as "NE/CNWSW" or footage from lines C SE/4 NE/4 NE/4
Lease Owner Robert E. White
Lease Name Curtis Well No. 1
Office Address 714 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed March 10 19 68
Application for plugging filed June 20 19 68
Application for plugging approved _____ 19 _____
Plugging commenced 6/28/68 19 _____
Plugging completed 7/ 2/68 19 _____
Reason for abandonment of well or producing formation not commercial

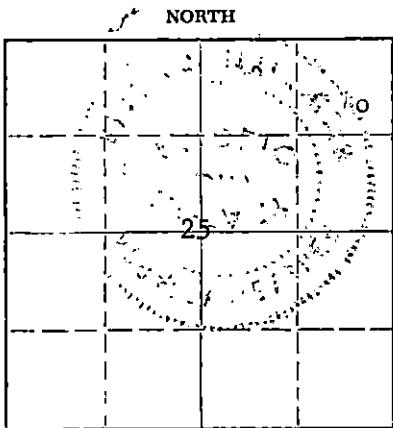

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4291 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface casing				10-3/4 5-1/2	613 4291	none 2795'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4263', ran sand to 4050' and ran 5 sacks of cement. Loaded hole, shot pipe at 3086', 2994', 2899', 2787', worked pipe loose and pulled 86 joints. Pumped 5 sacks of hulls, 20 sacks mud and 125 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JUL 9 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS


STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 3rd day of July, 19 68

My commission expires February 15, 1971

Margaret Melcher
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
JUN 21 1968
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

CURTIS NO. 1 (WASHDOWN)

15-145-00428-0001

CASING RECORD:	OPERATOR: Robert F. White	DESCRIPTION:
10" @ 622'	CONTRACTOR: Sage Drilling Co.	SE NE NE Sec. 25-23S-16W Pawnee County, Kansas.
TOTAL DEPTH: 4291'	COMMENCED: February 17, 1968	
	COMPLETED: February 18, 1968	

<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
0	4291	Washed hole down to old total depth; Conditioned hole; 5½" pipe set @ 4289' w/200 sax cement.

I certify that this is a true and correct copy of the operations in the washdown of the above captioned well to the best of my knowledge.

SAGE DRILLING CO., INC.

By Wayne W. Kahmeyer
Wayne W. Kahmeyer



Subscribed and sworn to before me this 20th day of February, 1968.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1970.