


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

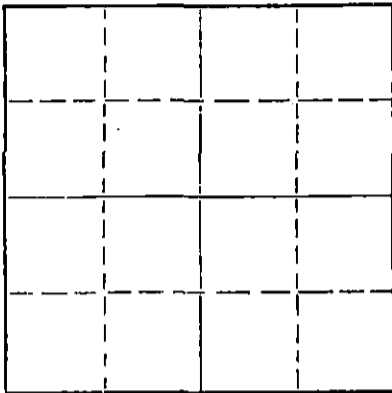

Locate well correctly on above
Section Plat

Pawnee County, Sec. 30 Twp. 23S Rge. (E) 16 (W)
Location as "NE/CNW/SW" or footage from lines C E/2 SW
Lease Owner Leben Drilling, Inc.
Lease Name Hammeke A Well No. 1
Office Address Box 486, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 10 19 71
Application for plugging filed March 10 19 71
Application for plugging approved March 10 19 71
Plugging commenced March 10 19 71
Plugging completed March 10 19 71
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4424' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		RECEIVED STATE CORPORATION COMMISSION MAR 12 1971 CONSERVATION DIVISION Wichita, Kansas		8 5/8"	815'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged @ 360' w/ 25 sx
40' w/ 1/2 sx hulls 10 sx
2 sx rat hole

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Leben Drilling, Inc.
Address Box 486, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
James R. Rodgers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Rodgers
Box 486, Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 11th day of March, 19 71
Donald M. Bennett
Notary Public.
My commission expires October 19, 1972



WELL LOG

Company Leben Drilling, Inc.
Contractor Leben Drilling, Inc.
Farm Hammeke A-1
Total Depth 4424'
Commenced February 27, 1971
Completed March 10, 1971

Sec. 30 T.23S R. 16W
Loc. C E/2 SW
County Pawnee
Casing 8 5/8" 20# new casing set @ 815'
cemented w/400 sx common 2% CC 1st 250 sx
Production w/500# Chip seal

D&A



Figures Indicate Bottom of Formations

170	Sand & Clay
450	Sand & Shale
550	Shale
815	Shale & Sand
1067	Shale & Red Bed
1083	Anhydrite
1910	Shale
2275	Lime & Shale
2379	Lime
2829	Lime & Shale
3275	Lime
3590	Lime & Shale
4424	Lime
<u>4424</u>	<u>RTD</u>

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1971
CONSERVATION DIVISION
Wichita, Kansas


State of Kansas
County of Barton } SS

I, James R. Rodgers of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Hammeke A-1 Well.

James R. Rodgers

Subscribed and sworn to before me this 11th day of March, 1971

My Commission Expires: October 19, 1972



Duma Mester Benoit