15.159.20341.0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

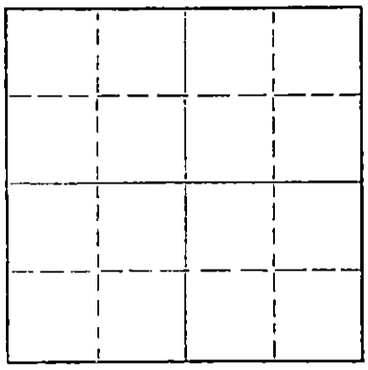

Locate well correctly on above Section Plat

Rice County. Sec. 8 Twp. 21 Rge. 6W (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines NW/4 SE/4 SE/4

Lease Owner Northridge Oil Co

Lease Name Walsten Well No. I-"G"

Office Address Bx 18271 Denver, Colorado

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed II-2 1970

Application for plugging filed II-17 1971

Application for plugging approved II-18 1971

Plugging commenced II-20 1971

Plugging completed II-20 1971

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3533' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5½"		I,443'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3533'3500'. Dumped 5 sx of cement. Mudded hole to 2IO'. Made IO' od of rock bridge. Dumped 35 sx of cement. Mudded hole to 40'. Made IO' of rock bridge. Dumped IO sx of cement, filling to the bottom of the celler.

RECEIVED
STATE CORPORATION COMMISSION
NOV 22 1971
CONSERVATION DIVISION
Wichita, Kansas
11-22-71

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.

Address 2809 King St Hutchinson, Kansas 6750I

STATE OF Kansas, COUNTY OF Reno, ss.

Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb

2809 King St Hutchinson, Kansas 6750I
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of November, 19 71

Judy Lamb
Notary Public.

My commission expires January 5, 19

15-159-20341-0000

KANSAS GEOLOGICAL SOCIETY

KANSAS WELL LOG BUREAU — KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
800 EAST MURDOCK - WICHITA, KANSAS

COMPANY COMMERCIAL OIL, INC.
SEC. 8 T. 21S R. 6W
FARM Halsten NO. 1 "G"
LOC. NW/4 SE/4 SE/4
COUNTY Rice
KANSAS

TOTAL DEPTH 3,533'
COMM. Oct. 26, 1970
COMP. Nov. 2, 1970
SHOT OR TREATED
CONTRACTOR H-30, Inc.
ISSUED

CASING

20 — 10
15 — 8-5/8" 168' cemented w/150 sx cement
12 — 6
13 — 5-1/2" 3527' cemented w/75 sx cement

ELEVATION 1694 KB
PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	50'
Red Bed	169'
Shale	1095'
Lime and Shale	1230'
Lime	1453'
Lime and Shale	1750'
Shale and Lime	2560'
Lime	2713'
Lime and Shale	2960'
Lime	3533'
Rotary Total Depth	3533'

RECEIVED
STATE CORPORATION COMMISSION
NOV 18 1971
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

STATE OF KANSAS }
COUNTY OF SEDGWICK } SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 9th. day of November, 1970

ELSIE WILLISON NOTARY PUBLIC SEDGWICK CO. KANS.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:
June 30, 1974