

TYPE

AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY

Compt. \_\_\_\_\_

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

F Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

C Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 6039 EXPIRATION DATE 6-30-83

OPERATOR L D Drilling/Exco, Inc. API NO. 15-185-21,744 . 0000

ADDRESS Route #1, Box 183B COUNTY Stafford

Great Bend, KS 67530 FIELD

\*\* CONTACT PERSON L. D. Davis PROD. FORMATION  
PHONE 316-793-3051

PURCHASER LEASE LEO HALL

ADDRESS WELL NO. 1

WELL LOCATION SW SE SE

DRILLING L. D. Drilling, Inc. 330 Ft. from South Line and

CONTRACTOR ADDRESS Route #1, Box 183B 990 Ft. from East Line of

Great Bend, KS 67530 the SE (Qtr.) SEC 17 TWP 21 RGE 12.

PLUGGING L. D. Drilling, Inc. WELL PLAT

CONTRACTOR ADDRESS Route #1, Box 183B (Office Use Only)

Great Bend, KS 67530

TOTAL DEPTH 3660' PBTD

SPUD DATE 2-15-83 DATE COMPLETED 2-22-83

ELEV: GR 1856' DF KB 1861'

DRILLED WITH (XXXX) (ROTARY) (XXXX) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE none


KCC  
KGS  
SWD/REP  
PLG.

Amount of surface pipe set and cemented 273' DV Tool Used? no

THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.


A F F I D A V I T

Don Popp, being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

*Don Popp*  
Don Popp (Name)

SUBSCRIBED AND SWORN TO BEFORE ME this 23rd day of February, 1983.



MY COMMISSION EXPIRES: 5-20-83

STATE COMMISSION RECEIVED  
Bessie M. DeWerff (NOTARY PUBLIC)  
FEB 23 1983  
CONSERVATION DIVISION  
Wichita, Kansas

\*\* The person who can be reached by phone regarding any questions concerning this information.

SIDE TWO L. D. Davis/

ACO-1 WELL HISTORY

OPERATOR L. D. Drilling/Exco, Inc. LEASE LEO HALL

SEC. 17 TWP. 21 RGE. 12

FILL IN WELL INFORMATION AS REQUIRED:

WELL NO. 1

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Check if no Drill Stem Tests Run.				
Sand	0	230	Anhy 649-677	
Red Bed	230	649	Heebner 3119	(-1258)
Anhy	649	677	Toronto 3142	(-1281)
Shale w/Shell's	677	725	Douglas 3154	(-1293)
Shale	725	1415	Br Lime 3251	(-1390)
Lime & Shale	1415	3660	Lans K/C 3267	(-1406)
			Base K/C 3480	(-1619)
			Viola 3487	(-1626)
			Simp Shle 3515	(-1654)
			Arbuckle 3572	(-1711)
			RTD 3660	(-1799)

DST #1 3610-3636  
 Times: 28-45-8-1  
 Blow: Weak Blow died in 25 min. 1st open, No blow second open  
 Rec: 15' Mud -- no shows  
 IFP 30      FFP 30  
 ISIP 50      FSIP 0

If additional space is needed use Page 2, Side 2

Report of all strings set—surface, intermediate, production, etc. CASING RECORD (New) or (Used)

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/4	8-5/8	23	273'	50/50 POZ	250	2% Gel, 3% CC

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

TUBING RECORD

Size	Setting depth	Packer set at

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD


Amount and kind of material used	Depth interval treated

Date of first production	Producing method (flowing, pumping, gas lift, etc.)	Gravity
Estimated Production -I.P.	Oil bbls. Gas MCF Water % Gas-oil ratio CFPB	
Disposition of gas (vented, used on lease or sold)		Perforations

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

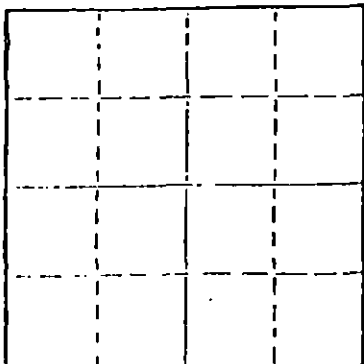

Locate well correctly on above  
Section Plot

Stafford County, Sec. 17 Twp. 21 Rge. 12 E/W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines  
SW SE SE  
Lease Owner L. D. Davis/L. D. Drilling, Inc.  
Lease Name Leo Hall Well No. #1  
Office Address Rt #1, Box 183B, Great Bend, KS 67530  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole  
Date Well completed February 22, 1983  
Application for plugging filed February 22, 1983  
Application for plugging approved February 22, 1983  
Plugging commenced 10:00 A.M. February 22, 1983  
Plugging completed 11:00 A.M. February 22, 1983  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bud Metz  
Producing formation Depth to top Bottom Total Depth of Well 3660'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

50/50 Poz. 40 SX @ 600'  
2% Gel 40 SX @ 300'  
3% cc 10 SX @ 40' with solid bridge  
10 SX in Rat Hole  
5 SX in Water Well

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor L. D. Drilling, Inc.

STATE OF KANSAS COUNTY OF BARTON, SS.  
Don Popp (employee of owner)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Popp  
Don Popp, Hoisington, KS 67544  
(Address)

SUBSCRIBED AND SWORN TO before me this 23 day of February, 1983

Bessie M. DeWerff  
Bessie M. DeWerff Notary Public.

My commission expires 5-20-85

