


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 N. Broadway
Wichita, Kansas

Hamilton County. Sec. 22 Twp. 21S Rge. 40W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NE/4 SW/4
Lease Owner Mack Oil Company
Lease Name Dikeman Unit Well No. 1
Office Address 812 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 11 1961
Application for plugging filed November 13 1961
Application for plugging approved November 13 1961
Plugging commenced December 6 1961
Plugging completed December 7 1961
Reason for abandonment of well or producing formation Dry Hole

NORTH

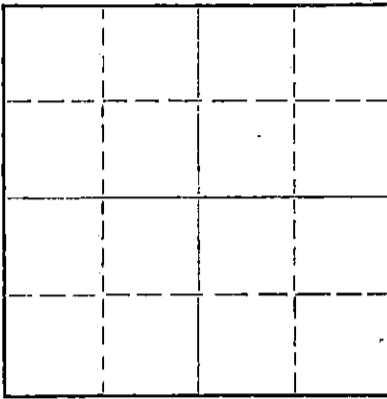

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp, Jr.
Producing formation None Depth to top Bottom Total Depth of Well 3251 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface sand & gravel	water	0	125	8 5/8	118	None
Permian sand	water	0	3050	2 7/8	3046	1987

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with sand from 2800' to 2750'
Plugged at 190' with 20 sacks of cement.
Plugged at 30' with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

CONSERVATION DIVISION
Wichita, Kansas

12-18-61

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mack Oil Company
Address Box 471, Duncan, Oklahoma

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Robert L. Harris (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Harris
812 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of December, 1961

Eudora Lee Bushman
Notary Public.

My commission expires September 8, 1963



MACK OIL COMPANY
Duncan, Oklahoma

DRILLERS WELL LOG

Dikeman Unit #1

C NE SW Sec. 22-21S-40W

Hamilton County, Kansas

Commenced R.D.: 8-6-61

Elevation: 3548 K.B.

Completed R.D.: 8-14-61

Initial Production:

Total Depth: 3250'

Contractor: Mack Oil Co.

Casing Record: 118' 8 5/8" O.D. Surface Casing

3046' 2 7/8" O.D. Production Casing

STRATA	DEPTH
Clay	0 - 40
Sand	40 - 70
Clay and post rock	70 - 148
Shale	148 - 760
Sand	760 - 900
Shale and shells	900 - 1180
Shale, shells, redbeds	1180 - 1345
Anhydrite	1345 - 1365
Redbeds and shells	1365 - 1461
Shale	1461 - 2010
Shale and lime	2010 - 2109
Shale, lime shells	2109 - 2330
Anhydrite	2330 - 2350
Shale	2350 - 2518
Shale and shell	2518 - 2788
Lime and shale	2788 - 3120
Lime	3120 - 3250

RECEIVED
STATE CORPORATION COMMISSION
NOV 13 1961
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

MACK OIL COMPANY

By Robert L. Harris

Signed and sworn to in my presence this 13th day of November, 1961, by Robert L. Harris, representative for Mack Oil Company.

Eudora Rae Barackman
Eudora Rae Barackman
Notary Public

My commission expires September 8, 1963.