


15.185.20529.0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

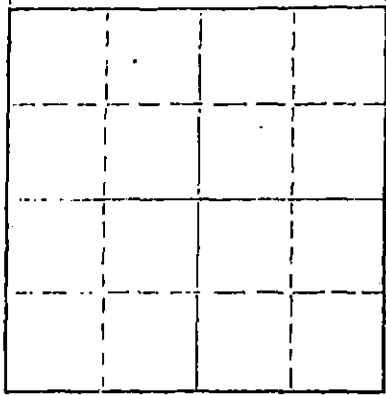

Locate well correctly on above
Section Plat

Stafford County. Sec. 13 Twp. 21S Rge. (E)-14(W)
Location as "NE/CNW/SE/SW" or footage from lines C NW SW
Lease Owner Wolland, Inc.
Lease Name Hammond Well No. _____
Office Address P. O. Box 519 - Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 2, 1974
Application for plugging filed September 2, 1974
Application for plugging approved September 2, 1974
Plugging commenced September 2, 1974
Plugging completed September 2, 1974
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well George Russell Bieberstein - Attica, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3730 Feet
Shoal depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface					
	Casing	0	267	8 5/8"	267'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Heavy mud from Total Depth to 250'
35 sacks cement plug at 250', mud
to 40', 1/2 sack hulls, plug, bridge
15 sacks cement to base of cellar,
2 sacks in rats hole. Job completed
at 3:05 am.

RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sun Oilwell Cementing Co.
Address Great Bend, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Emily Day (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emily Day
P. O. Box 18148 - Wichita, Kansas 67218
(Address)



Sworn to before me this 3rd day of September, 1974
Maxine Dressen
Notary Public.

15.185.20529.0000

DRILLERS LOG

HAMMOND NO. 1

<u>CASING RECORD:</u> 8 5/8" set at 267' w/225 sacks cement	<u>OPERATOR:</u> Wolland, Inc.	<u>DESCRIPTION:</u> C NW SW ²¹ Sec. 13-1/2S-14W Stafford County, Kansas
<u>TOTAL DEPTH:</u> 3730'	<u>CONTRACTOR:</u> Search Drilling Company	
	<u>COMMENCED:</u> August 28, 1974	
	<u>COMPLETED:</u> September 2, 1974	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	70	
Sand	70	200	
Shale	200	270	
Sand, Shells, Shale	270	824	
Anhydrite	824	833	
Shale	833	1060	
Shale	1060	1700	
Shale	1700	1740	
Shale	1740	1848	
Shale and Lime	1848	2210	
Shale and Lime	2210	2520	
Shale	2520	2790	
Lime and Shale	2790	3000	
Lime and Shale	3000	3184	
Lime and Shale	3184	3365	
Lime	3365	3440	
Lime	3440	3495	
Lime	3495	3560	
Lime and Shale	3560	3680	
Lime	3680	3730	

RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1974
CONSERVATION DIVISION
Wichita, Kansas

D & A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SEARCH DRILLING COMPANY

E. F. Day

E. F. Day

Subscribed and sworn to before me this 3rd. day of September, 1974.

My commission expires:
February 19, 1977

Maxine Dressen

Maxine Dressen Notary Public

