


15-009-07369-00-00

STATE OF KANSAS
CORPORATION COMMISSION

WELL PLUGGING RECORD

on Completely
Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

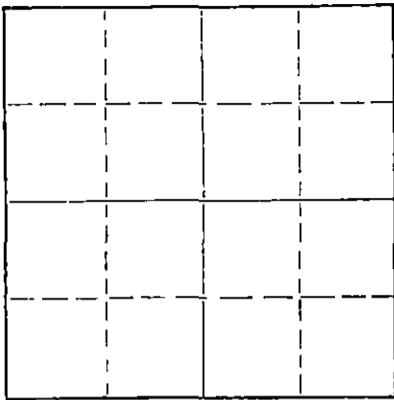

Locate well correctly on above
Section Plat

Barton County. Sec. 16 Twp. 16 Rge. 12 (E) (W)
Location as "NE/CNW/SW" or footage from lines SW NW SW
Lease Owner Santa Fe Pipe & Supply
Lease Name Kultgen Well No. E-2
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 9-14 1954
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 9-19 1961
Plugging completed 9-22 1961
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Depth to top Bottom Total Depth of Well 3372' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with sand to 3350'.
Dumped 5 sacks of cement.
Shot pipe at 2863' and 2801'.
Bailed hole to 320'.
Bridged hole with 10' rock and
25 sacks of cement.
Filled hole with mud to 35',
capped with 10 sacks cement.

11-6-61
11-6-61

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pullers, Inc.
Address Box 486 Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Pipe Pullers, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Sam Allen

(Address)

SUBSCRIBED AND SWORN TO before me this 6 day of October, 1961

My commission expires December 18, 1962

Juanita R. Myers
Notary Public.



15-009-07369-00-00
WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


COPY

Company- FRANCO CENTRAL OIL CO.
 Farm- Kultgen "E" No. 2

SEC. 16 T. 16 R. 12W
 SWc NW SW

Total Depth. 3372'
 Comm. 9-6-54 Comp. 9-14-54
 Shot or Treated.
 Contractor. Lewis Drilling Co.
 Issued. 12-11-54

County Barton
 KANSAS



Elevation. 1917' RB

Production. Pmp 8 BO & 40 BW

CASING:

8 5/8" 341'
 5 1/2" 3369'

Figures indicate Bottom of Formations.

post rock	50
shale	300
sand	315
shale	341
shale & shells	575
red bed	825
anhydrite	845
redbed, shale & shells	1355
lime & shale	1960
lime	2000
shale & shells	2305
lime & shale	3200
lime	3365
lime & shale	3372
Total Depth	

Tops:	
Heebner	2989
Brown Lime	3077
Lansing	3088
Chert	3360
Basal Sand	3368

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 6 1961
 CONSERVATION DIVISION
 Wichita, Kansas