


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

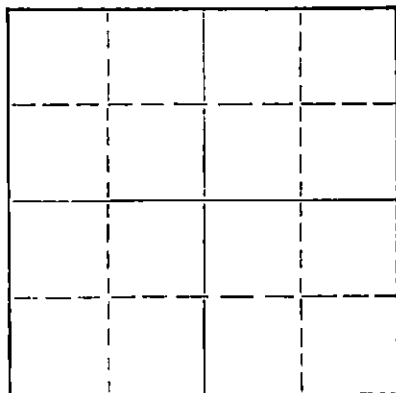

Locate well correctly on above
Section Plat

Rice County, Sec. 14 Twp. 21 Rge. 7 (E) (W) X
Location as "NE/CNW/SW" or footage from lines. C SW NE

Lease Owner Aspen Drilling Company
Lease Name O'Connell Well No. 1
Office Address P. O. Box 783 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced May 12, 1970 19
Plugging completed May 18, 1970 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Giberstein
Producing formation Depth to top Bottom Total Depth of Well 3470 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	169	None
				5 1/2	None	2947'.92

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rigged up jacks, had 18" tension. Shot well at 2927' and worked casing loose.

Started to pull casing, casing stuck, working casing. Spotted oil at 2927'.

Working casing, had 15" tension and gained 3" to 18".

Working casing. Pulled 50 joints of 5 1/2" casing.

Finished pulling casing.

Loaded trailer. Plugging well. Set rock bridge from 215' to 200' and dumped 35 sacks of cement. Mudded to 40', dumped 10' rock bridge and 10 sacks of cement for cap on well. Tore down and moved unit off location.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22 day of May 19 70

My commission expires



Notary Public.

DRILLERS LOG

COMPANY:	Aspen Drilling Co.
CONTRACTOR:	Aspen Drilling Co.
LEASE NAME:	O'Connell #1
LOCATION:	C SW NE Sec.14-T21S-R7W
	Rice County, Kansas
ELEVATION:	1599 KB
SURFACE CASING:	4 jts.(160') 8 5/8"
OIL STRING:	107 jts.(3432') 5 1/2"
COMMENCED:	12-30-67
COMPLETED:	1-7-68
ROTARY TOTAL DEPTH:	3470'

<u>FORMATION</u>	<u>DEPTH</u>
Red Bed-Shale	625
Shale	1115
Shale-Lime	1460
Lime-Shale	1680
Shale-Lime	2280
Lime-Shale	2875
Shale-Lime	2954
Lime	3390
Cong.	3397
Lime-Chert	3470

Ran 4 jts.(160') 8 5/8", set at 168', cemented with 175 sacks. Cement circulated.

DST #1	3385-3397
DST #2	3412-3470

Ran Electric Log.

Ran 107 jts.(3432') 5 1/2", set at 3420', cemented with 75 sacks.

LOG TOPS

Heebner	2687
Toronto	2704
Douglas	2710
Brown Lime	2865
Lansing	2883
Lansing 'C'	2911
Base K.C.	3239
Conglomerate Chert	3385
Mississippian Chert	3411
Mississippian Lime	3470


RECEIVED
STATE CORPORATION COMMISSION
MAY 1 1970
CONSERVATION DIVISION
Wichita, Kansas

AFFIDAVIT

State of Kansas)
) ss:
County of Barton)

The undersigned, being duly sworn on oath, states that the above statement and log are a true and correct record and log of the well drilled at the location above described.

William S. Schachle
William S. Schachle



Subscribed and sworn to before me this 12th day of January, 1968.

Theora Holleman
Theora Holleman, Notary Public

My commission expires: April 18, 1968.