


15-009-03374-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

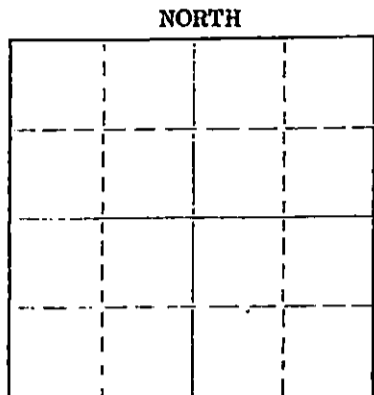

Locate well correctly on above Section Plot

Barton County, Sec. 24 Twp. 16 Rgs. 12 (E) (W) X
Location as "NE/CNW&SW" or footage from lines NW SE SE
Lease Owner National Cooperative Refining Assoc.
Lease Name Paul Dolechek Well No. #7
Office Address Box 6 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2-13-75 19
Plugging completed 2-17-75 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Depth to top Bottom Total Depth of Well 3373' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3355'	1834.40'
				8 5/8"	264'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3320'. Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls and 20 sacks gel. Released plug and displaced with 100 sacks 50/50 pozmix 4% gel.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

Subscribed and Sworn to before me this 19 day of February 19 75



RECEIVED
STATE CORPORATION COMMISSION

FEB 20 1975

CONSERVATION DIVISION
WICHITA, KANSAS

COMPANY: Black-Marshall Oil Company
 CONTRACTOR: Black-Marshall Oil Company

FARM: Paul Dolechek #7
 LOCATION: NW SE SE 24-16-12
 Barton Co., Kansas

COMMENCED: 9-1-46
 COMPLETED: 9-18-46

CASING RECORD:
 8 5/8" at 264 90 sax
 5 1/2" at 3355 100 "

ELEVATION: 1921

PRODUCTION:

<u>Formation</u>	<u>Depth</u>
Clay and sand	264
Shale and red bed	350
Sand	420
Shale and red bed	560
Red shale	770
Anhydrite	805
Shale	835
Shale and shells	1190
Salt	1380
Shale and shells	1615
Shale and lime	1740
Lime	1869
Shale and lime	1955
Lime	2075
Shale and lime	2150
Shale and shells	2275
Shale	2565
Shale and lime	2725
Lime	2825
Shale and lime	2895
Shale	2940
Lime	2958
Shale and lime	3155
Lime	3200
Shale and lime	3325
Shale, lime, and sand	3356

Anhydrite 770
 Lansing 3082-no shows
 Sand 3354

RECEIVED
 STATE CORPORATION COMMISSION
 9 12 1975
 CONSERVATION DIVISION
 Wichita, Kansas

Swabbed 8.35 BOPH

ROTARY TOTAL DEPTH 3356
 CABLE TOTAL DEPTH 3367



STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

We hereby certify this to be a correct and accurate log of the above described well as shown by the daily drilling reports.

BLACK-MARSHALL OIL COMPANY

James J. [Signature]
 Vice President and Assistant Secretary

Subscribed and sworn to before me this 23rd day of September, 1946.

Harmon Reinhardt [Signature]
 Notary Public